

UTILITY APPLICATION

UNDER 37 CFR § 1.53(B)


TITLE: SUBCUTANEOUS ELECTRODE FOR
TRANSTHORACIC CONDUCTION WITH HIGHLY
MANEUVERABLE INSERTION TOOL

APPLICANT(S): GUST H. BARDY, M.D.; RICCARDO CAPPATO,
M.D.; WILLIAM J. RISSMANN; GARY H.
SANDERS

Correspondence Enclosed:

Utility Application Transmittal Sheet and FY 2001
Fee Transmittal Sheet (2 pgs); Specification
(192 pgs); Claims (44 pgs); Drawings (72 pgs);
Abstract (1 pg); and Return Postcard

"EXPRESS MAIL" Mailing Label Number EL573394948US Date of Deposit August 27, 2001 I
hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United
States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the
date indicated above and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

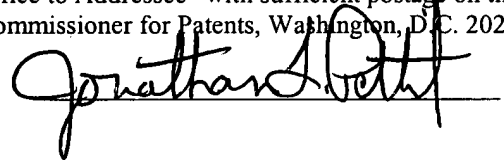

10/23/01 9:50:46 AM

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

09940356-082701

**Subcutaneous Electrode for Transthoracic Conduction
with Highly Maneuverable Insertion Tool**

Inventors:

Gust H. Bardy

Riccardo Cappato

William J. Rissmann

Gary H. Sanders

032580.0023

Field of the Invention

The present invention relates to an apparatus and method for performing electrical cardioversion/defibrillation and optional pacing of the heart via a totally subcutaneous non-transvenous system.

CROSS-REFERENCE TO RELATED APPLICATIONS

10 The present application is a continuation-in-part of U.S. patent application entitled "SUBCUTANEOUS ONLY IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR AND OPTIONAL PACER," having Serial No. 09/663,606, filed September 18, 2000, pending, and U.S. patent application entitled "UNITARY SUBCUTANEOUS ONLY IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR AND OPTIONAL PACER," having Serial No. 09/663,607, filed September 18, 2000, pending, of which both applications are assigned to the assignee of the present application, and the disclosures of both applications are hereby incorporated by reference.

20 In addition, the present application is filed concurrently herewith U.S. patent application entitled "DUCKBILL-SHAPED IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR AND METHOD OF USE," U.S. patent application entitled "CERAMICS AND/OR OTHER MATERIAL INSULATED SHELL FOR ACTIVE AND NON-ACTIVE S-ICD CAN," U.S. patent application entitled "SUBCUTANEOUS ELECTRODE FOR

TRANSTHORACIC CONDUCTION WITH IMPROVED INSTALLATION
CHARACTERISTICS," U.S. patent application entitled "SUBCUTANEOUS
ELECTRODE WITH IMPROVED CONTACT SHAPE FOR TRANSTHORACIC
CONDUCTION," U.S. patent application entitled "SUBCUTANEOUS
5 ELECTRODE FOR TRANSTHORACIC CONDUCTION WITH LOW-PROFILE
INSTALLATION APPENDAGE AND METHOD OF DOING SAME," U.S. patent
application entitled "SUBCUTANEOUS ELECTRODE FOR TRANSTHORACIC
CONDUCTION WITH INSERTION TOOL," U.S. patent application
entitled "METHOD OF INSERTION AND IMPLANTATION FOR IMPLANTABLE
10 CARDIOVERTER-DEFIBRILLATOR CANISTERS," U.S. patent application
entitled "CANISTER DESIGNS FOR IMPLANTABLE CARDIOVERTER-
DEFIBRILLATORS," U.S. patent application entitled "RADIANT CURVED
IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR CANISTER," U.S. patent
application entitled "CARDIOVERTER-DEFIBRILLATOR HAVING A
15 FOCUSED SHOCKING AREA AND ORIENTATION THEREOF," U.S. patent
application entitled "BIPHASIC WAVEFORM FOR ANTI-BRADYCARDIA
PACING FOR A SUBCUTANEOUS IMPLANTABLE CARDIOVERTER-
DEFIBRILLATOR," U.S. patent application entitled "BIPHASIC
WAVEFORM FOR ANTI-TACHYCARDIA PACING FOR A SUBCUTANEOUS
20 IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR," and U.S. patent
application entitled "POWER SUPPLY FOR A SUBCUTANEOUS
IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR," the disclosures of
which applications are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

Defibrillation/cardioversion is a technique employed to counter arrhythmic heart conditions including some tachycardias in the atria and/or ventricles. Typically, electrodes are employed to stimulate the heart with electrical impulses or shocks, of a magnitude substantially greater than pulses used in cardiac pacing.

Defibrillation/cardioversion systems include body implantable electrodes and are referred to as implantable cardioverter/defibrillators (ICDs). Such electrodes can be in the form of patches applied directly to epicardial tissue, or at the distal end regions of intravascular catheters, inserted into a selected cardiac chamber. U.S. Pat. Nos. 4,603,705, 4,693,253, 4,944,300, 5,105,810, the disclosures of which are all incorporated herein by reference, disclose intravascular or transvenous electrodes, employed either alone or in combination with an epicardial patch electrode. Compliant epicardial defibrillator electrodes are disclosed in U.S. Pat. Nos. 4,567,900 and 5,618,287, the disclosures of which are incorporated herein by reference. A sensing epicardial electrode configuration is disclosed in U.S. Pat No. 5,476,503, the disclosure of which is incorporated herein by reference.

In addition to epicardial and transvenous electrodes, subcutaneous electrode systems have also been developed. For example, U.S. Patent Nos. 5,342,407 and 5,603,732, the disclosures of which are incorporated herein by reference, teach the use of a pulse monitor/generator surgically implanted into the abdomen and subcutaneous electrodes implanted in the thorax. This system is far more complicated to use than current ICD systems using transvenous lead systems together with an active can electrode and therefore it has no practical use. It has in fact never been used because of the surgical difficulty of applying such a device (3 incisions), the impractical abdominal location of the generator and the electrically poor sensing and defibrillation aspects of such a system.

Recent efforts to improve the efficiency of ICDs have led manufacturers to produce ICDs which are small enough to be implanted in the pectoral region. In addition, advances in circuit design have enabled the housing of the ICD to form a subcutaneous electrode. Some examples of ICDs in which the housing of the ICD serves as an optional additional electrode are described in U.S. Pat. Nos. 5,133,353, 5,261,400, 5,620,477, and 5,658,321 the disclosures of which are incorporated herein by reference.

ICDs are now an established therapy for the management of life threatening cardiac rhythm disorders, primarily

ventricular fibrillation (V-Fib). ICDs are very effective at treating V-Fib, but are therapies that still require significant surgery.

As ICD therapy becomes more prophylactic in nature and used in progressively less ill individuals, especially children at risk of cardiac arrest, the requirement of ICD therapy to use intravenous catheters and transvenous leads is an impediment to very long term management as most individuals will begin to develop complications related to lead system malfunction sometime in the 5-10 year time frame, often earlier. In addition, chronic transvenous lead systems, their reimplantation and removals, can damage major cardiovascular venous systems and the tricuspid valve, as well as result in life threatening perforations of the great vessels and heart. Consequently, use of transvenous lead systems, despite their many advantages, are not without their chronic patient management limitations in those with life expectancies of >5 years. The problem of lead complications is even greater in children where body growth can substantially alter transvenous lead function and lead to additional cardiovascular problems and revisions. Moreover, transvenous ICD systems also increase cost and require specialized interventional rooms and equipment as well as special skill for insertion. These systems are typically

implanted by cardiac electrophysiologists who have had a great deal of extra training.

In addition to the background related to ICD therapy, the present invention requires a brief understanding of automatic external defibrillator (AED) therapy. AEDs employ the use of cutaneous patch electrodes to effect defibrillation under the direction of a bystander user who treats the patient suffering from V-Fib. AEDs can be as effective as an ICD if applied to the victim promptly within 2 to 3 minutes.

AED therapy has great appeal as a tool for diminishing the risk of death in public venues such as in air flight. However, an AED must be used by another individual, not the person suffering from the potential fatal rhythm. It is more of a public health tool than a patient-specific tool like an ICD. Because >75% of cardiac arrests occur in the home, and over half occur in the bedroom, patients at risk of cardiac arrest are often alone or asleep and can not be helped in time with an AED. Moreover, its success depends to a reasonable degree on an acceptable level of skill and calm by the bystander user.

What is needed therefore, especially for children and for prophylactic long term use, is a combination of the two forms of therapy which would provide prompt and near-certain defibrillation, like an ICD, but without the long-term adverse sequelae of a transvenous lead system while simultaneously using

most of the simpler and lower cost technology of an AED. What is also needed is a cardioverter/defibrillator that is of simple design and can be comfortably implanted in a patient for many years.

5

SUMMARY OF THE INVENTION

One embodiment of the present invention provides a lead electrode assembly for subcutaneous implantation including an electrode; at least two channel guides coupled to the electrode for positioning the lead electrode assembly.

09940356-032701
T02290-95E04660

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the invention, reference is now made to the drawings where like numerals represent similar objects throughout the figures where:

FIG. 1 is a schematic view of a Subcutaneous ICD (S-ICD) of the present invention;

FIG. 2 is a schematic view of an alternate embodiment of a subcutaneous electrode of the present invention;

FIG. 3 is a schematic view of an alternate embodiment of a subcutaneous electrode of the present invention;

FIG. 4 is a schematic view of the S-ICD and lead of FIG. 1 subcutaneously implanted in the thorax of a patient;

FIG. 5 is a schematic view of the S-ICD and lead of FIG. 2 subcutaneously implanted in an alternate location within the thorax of a patient;

FIG. 6 is a schematic view of the S-ICD and lead of FIG. 3 subcutaneously implanted in the thorax of a patient;

FIG. 7 is a schematic view of the method of making a subcutaneous path from the preferred incision and housing implantation point to a termination point for locating a subcutaneous electrode of the present invention;

FIG. 8 is a schematic view of an introducer set for performing the method of lead insertion of any of the described embodiments;

FIG. 9 is a schematic view of an alternative S-ICD of the present invention illustrating a lead subcutaneously and serpiginously implanted in the thorax of a patient for use particularly in children;

FIG. 10 is a schematic view of an alternate embodiment of an S-ICD of the present invention;

FIG. 11 is a schematic view of the S-ICD of FIG. 10 subcutaneously implanted in the thorax of a patient;

FIG. 12 is a schematic view of yet a further embodiment where the canister of the S-ICD of the present invention is shaped to be particularly useful in placing subcutaneously adjacent and parallel to a rib of a patient; and

FIG. 13 is a schematic of a different embodiment where the canister of the S-ICD of the present invention is shaped to be particularly useful in placing subcutaneously adjacent and parallel to a rib of a patient.

5 FIG. 14 is a schematic view of a Unitary Subcutaneous ICD (US-ICD) of the present invention;

FIG. 15 is a schematic view of the US-ICD subcutaneously implanted in the thorax of a patient;

FIG. 16 is a schematic view of the method of making a subcutaneous path from the preferred incision for implanting the US-ICD.

FIG. 17 is a schematic view of an introducer for performing the method of US-ICD implantation; and

FIG. 18 is an exploded schematic view of an alternate embodiment of the present invention with a plug-in portion that contains operational circuitry and means for generating cardioversion/defibrillation shock waves.

FIG. 14(a) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

20 FIG. 14(b) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

FIG. 14(c) is a side plan view of a section of the lead in an embodiment of the lead electrode assembly;

FIG. 14(d) is a cross-sectional view of a filar in the lead in an embodiment of the lead electrode assembly;

FIG. 14(e) is a cross-sectional view of the lead fastener of an embodiment of a lead electrode assembly;

5 FIG. 14(f) is an exploded view of the lead fastener of an embodiment of a lead electrode assembly;

FIG. 15(a) is a cross-sectional front plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

10 FIG. 15(b) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin;

FIG. 16(a) is a perspective view of an embodiment of a lead electrode assembly with a top-mounted fin;

FIG. 17(a) is a cross-sectional side plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(b) is a cross-sectional side plan view of an embodiment of a lead electrode assembly with a top-mounted fin that is slope-shaped and a molded cover;

20 FIG. 17(c) is cross-sectional front plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(d) is an exploded top plan view of the lead fastener in an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(e) is a bottom plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 17(f) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

5 FIG. 17(g) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin and a molded cover;

FIG. 18(a) is a side plan view of an embodiment of a lead electrode assembly with an elongated top-mounted fin and a molded cover;

10 FIG. 18(b) is a top plan view of an embodiment of a lead electrode assembly with an elongated top-mounted fin and a molded cover;

FIG. 18(c) is a bottom plan view of an embodiment of a lead electrode assembly with an elongated top-mounted fin and a molded cover;

15 FIG. 19 is a side plan view of a lead electrode assembly demonstrating the curvature of the electrode;

20 FIG. 20(a) is a top plan view of the backing layer and electrode of an embodiment of a lead electrode assembly with a side-mounted fin;

FIG. 20(b) is a side plan view of the backing layer and electrode of an embodiment of a lead electrode assembly with a side-mounted fin;

FIG. 20(c) is a bottom plan view of an embodiment of a lead electrode assembly with a side-mounted fin;

FIG. 20(d) is a bottom plan view of an embodiment of a lead electrode assembly with a side-mounted fin with a slope-shape;

5 FIG. 21(a) is a side plan view of a lead electrode assembly with a top-mounted loop;

FIG. 21(b) is a cross-sectional rear plan view of a lead electrode assembly with a top-mounted loop;

10 FIG. 21(c) is a top plan view of a lead electrode assembly with a top-mounted loop;

FIG. 22(a) is a top plan view of a backing layer for use in an embodiment of a lead electrode assembly with a top-mounted fin formed as part of the backing layer;

15 FIG. 22(b) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of the backing layer;

FIG. 22(c) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of the backing layer;

20 FIG. 22(d) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of a backing layer;

FIG. 22(e) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of a two-piece backing layer;

FIG. 22(f) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin formed as part of a two-piece backing layer;

FIG. 23(a) is a front plan view of the embodiment of the lead electrode assembly of FIG. 22(e) and (f) in an upright position;

FIG. 23(b) is a front plan view of the embodiment of the lead electrode assembly of FIG. 22(e) and (f) illustrating the ability of the fin to fold;

FIG. 24(a) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted tube formed as part of a backing layer;

FIG. 24(b) is a side plan view of an embodiment of a lead electrode assembly with a top-mounted tube formed as part of a backing layer;

FIG. 24(c) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted tube formed as part of a backing layer;

FIG. 25(a) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin connected with flexible joining material in an upright position;

FIG. 25(b) is a front plan view of an embodiment of a lead electrode assembly with a top-mounted fin connected with flexible joining material in a folded position;

FIG. 25(c) is a top plan view of an embodiment of a lead electrode assembly with a top-mounted fin connected with flexible joining material in an upright position;

FIG. 26 is a perspective view of an embodiment of a lead electrode assembly in which the appendage is a cylindrical tube;

FIG. 27 is a perspective view of an embodiment of a lead electrode assembly in which the appendage is a tube with a substantially triangular cross section;

FIGS. 28(a)-(d) are top plan views of embodiments of lead electrode assemblies illustrating shapes of the electrode and the lines of the lead;

FIGS. 28(e)-(h) are bottom plan views of embodiments of lead electrode assemblies illustrating shapes of the electrode;

FIG. 29 is a perspective view of a custom hemostat for lead electrode assembly implantation;

FIG. 30(a) is a perspective view of a patient's ribcage showing the orientation of the components in an implanted S-ICD system;

FIG. 30(b) is a cross-sectional side plan view of a patient's rib cage, skin, fat and the lead of the lead electrode assembly;

FIG. 31 is a front plan view illustrating the incision point for the surgery to implant the lead electrode assembly;

FIG. 32(a) is a cross-sectional bottom plan view of a patient along line 32(a) of FIG. 31 illustrating the creation of a subcutaneous path for implantation of the lead electrode assembly of an S-ICD system;

FIG. 32(b) is a perspective view of a lead electrode assembly captured by a custom hemostat;

FIG. 32(c) is a cross-sectional bottom plan view of a patient along line 32(a) of FIG. 31 illustrating the implantation of a lead electrode assembly via the subcutaneous path;

FIG. 32(d) is a top view of a lead electrode assembly captured by a custom hemostat;

FIG. 33(a) is a perspective view of a rail of an embodiment of the lead electrode assembly;

FIG. 33(b) is a cross-sectional front plan view of an embodiment of the lead electrode assembly where the appendage is a rail;

FIG. 33(c) is a top plan view of an embodiment of the lead electrode assembly where the appendage is a rail;

FIG. 34 is a top view of an embodiment of the lead electrode assembly where the appendage is a rail;

FIG. 35(a) is a perspective view of a lead electrode assembly manipulation tool with a rail fork;

FIG. 35(b) is a top plan view of a lead electrode assembly manipulation tool with a rail fork;

5 FIG. 35(c) is a side plan view of a lead electrode assembly manipulation tool with a rail fork;

FIG. 35(d) is a top plan view of a lead electrode assembly having a rail captured by a lead electrode assembly manipulation tool with a rail fork;

10 FIG. 36(a) is a cross-sectional side plan view of a lead electrode assembly with a pocket;

FIG. 36(b) is a top plan view of a lead electrode assembly with a pocket;

FIG. 36(c) is a cross-sectional side plan view of a lead electrode assembly with a pocket and a fin;

15 FIG. 37(a) is a bottom plan view of a lead electrode assembly with a pocket;

FIG. 37(b) is a top plan view of a lead electrode assembly with a pocket;

20 FIG. 38(a) is a top plan view of a lead electrode assembly manipulation tool with a paddle;

FIG. 38(b) is a side plan view of a lead electrode assembly manipulation tool with a paddle;

FIG. 38(c) is a top plan view of a lead electrode assembly with a pocket captured by a lead electrode assembly manipulation tool with a paddle;

FIG. 39(a) is a cross-sectional rear plan view of a lead electrode assembly with a first channel guide and a second channel guide;

FIG. 39(b) is a top plan view of a lead electrode assembly with a first channel guide and a second channel guide;

FIG. 40(a) is a top plan view of a lead electrode assembly manipulation tool with a channel guide fork;

FIG. 40(b) is a top plan view of a lead electrode assembly with a first channel guide and a second channel guide captured by a lead electrode assembly manipulation tool with a channel guide fork;

FIG. 41(a) is a perspective view of a subcutaneous implantable cardioverter-defibrillator kit; and

FIG. 41(b) is a perspective view of a hemostat illustrating the length measurement.

DETAILED DESCRIPTION

Turning now to FIG. 1, the S-ICD of the present invention is illustrated. The S-ICD consists of an electrically active canister 11 and a subcutaneous electrode 13 attached to the canister. The canister has an electrically active surface 15 that is electrically insulated from the electrode connector

block 17 and the canister housing 16 via insulating area 14. The canister can be similar to numerous electrically active canisters commercially available in that the canister will contain a battery supply, capacitor and operational circuitry.

5 Alternatively, the canister can be thin and elongated to conform to the intercostal space. The circuitry will be able to monitor cardiac rhythms for tachycardia and fibrillation, and if detected, will initiate charging the capacitor and then delivering cardioversion /defibrillation energy through the active surface of the housing and to the subcutaneous electrode.

10 Examples of such circuitry are described in U.S. Patent Nos. 4,693,253 and 5,105,810, the entire disclosures of which are herein incorporated by reference. The canister circuitry can provide cardioversion/ defibrillation energy in different types of waveforms. In the preferred embodiment, a 100 uF biphasic waveform is used of approximately 10-20 ms total duration and with the initial phase containing approximately 2/3 of the energy, however, any type of waveform can be utilized such as monophasic, biphasic, multiphasic or alternative waveforms as is
20 known in the art.

In addition to providing cardioversion/ defibrillation energy, the circuitry can also provide transthoracic cardiac pacing energy. The optional circuitry will be able to monitor the heart for bradycardia and/or tachycardia rhythms. Once a

bradycardia or tachycardia rhythm is detected, the circuitry can then deliver appropriate pacing energy at appropriate intervals through the active surface and the subcutaneous electrode. Pacing stimuli will be biphasic in the preferred embodiment and similar in pulse amplitude to that used for conventional transthoracic pacing.

This same circuitry can also be used to deliver low amplitude shocks on the T-wave for induction of ventricular fibrillation for testing S-ICD performance in treating V-Fib as is described in U.S. Patent No. 5,129,392, the entire disclosure of which is hereby incorporated by reference. Also the circuitry can be provided with rapid induction of ventricular fibrillation or ventricular tachycardia using rapid ventricular pacing. Another optional way for inducing ventricular fibrillation would be to provide a continuous low voltage, i.e., about 3 volts, across the heart during the entire cardiac cycle.

Another optional aspect of the present invention is that the operational circuitry can detect the presence of atrial fibrillation as described in Olson, W. et al. "Onset And Stability For Ventricular Tachyarrhythmia Detection in an Implantable Cardioverter and Defibrillator," Computers in Cardiology (1986) pp. 167-170. Detection can be provided via R-R Cycle length instability detection algorithms. Once atrial fibrillation has been detected, the operational circuitry will

then provide QRS synchronized atrial
defibrillation/cardioversion using the same shock energy and
waveshape characteristics used for ventricular defibrillation/
cardioversion.

5 The sensing circuitry will utilize the electronic signals
generated from the heart and will primarily detect QRS waves.
In one embodiment, the circuitry will be programmed to detect
only ventricular tachycardias or fibrillations. The detection
circuitry will utilize in its most direct form, a rate detection
10 algorithm that triggers charging of the capacitor once the
ventricular rate exceeds some predetermined level for a fixed
period of time: for example, if the ventricular rate exceeds
240 bpm on average for more than 4 seconds. Once the capacitor
is charged, a confirmatory rhythm check would ensure that the
rate persists for at least another 1 second before discharge.
Similarly, termination algorithms could be instituted that
ensure that a rhythm less than 240 bpm persisting for at least 4
seconds before the capacitor charge is drained to an internal
resistor. Detection, confirmation and termination algorithms as
20 are described above and in the art can be modulated to increase
sensitivity and specificity by examining QRS beat-to-beat
uniformity, QRS signal frequency content, R-R interval stability
data, and signal amplitude characteristics all or part of which

can be used to increase or decrease both sensitivity and specificity of S-ICD arrhythmia detection function.

10 In addition to use of the sense circuitry for detection of
V-Fib or V-Tach by examining the QRS waves, the sense circuitry
5 can check for the presence or the absence of respiration. The
respiration rate can be detected by monitoring the impedance
across the thorax using subthreshold currents delivered across
the active can and the high voltage subcutaneous lead electrode
and monitoring the frequency in undulation in the waveform that
results from the undulations of transthoracic impedance during
the respiratory cycle. If there is no undulation, then the
patient is not respiring and this lack of respiration can be used
to confirm the QRS findings of cardiac arrest. The same
technique can be used to provide information about the
respiratory rate or estimate cardiac output as described in U.S.
Patent Nos. 6,095,987, 5,423,326, 4,450,527, the entire
disclosures of which are incorporated herein by reference.

20 The canister of the present invention can be made out of
titanium alloy or other presently preferred electrically active
canister designs. However, it is contemplated that a malleable
canister that can conform to the curvature of the patient's
chest will be preferred. In this way the patient can have a
comfortable canister that conforms to the shape of the patient's
rib cage. Examples of conforming canisters are provided in U.S.

Patent No. 5,645,586, the entire disclosure of which is herein incorporated by reference. Therefore, the canister can be made out of numerous materials such as medical grade plastics, metals, and alloys. In the preferred embodiment, the canister is smaller than 60 cc volume having a weight of less than 100 gms for long term wearability, especially in children. The canister and the lead of the S-ICD can also use fractal or wrinkled surfaces to increase surface area to improve defibrillation capability. Because of the primary prevention role of the therapy and the likely need to reach energies over 40 Joules, a feature of the preferred embodiment is that the charge time for the therapy, intentionally is relatively long to allow capacitor charging within the limitations of device size. Examples of small ICD housings are disclosed in U.S. Patents Nos. 5,597,956 and 5,405,363, the entire disclosures of which are herein incorporated by reference.

Different subcutaneous electrodes 13 of the present invention are illustrated in FIGS. 1-3. Turning to FIG. 1, the lead 21 for the subcutaneous electrode is preferably composed of silicone or polyurethane insulation. The electrode is connected to the canister at its proximal end via connection port 19 which is located on an electrically insulated area 17 of the canister. The electrode illustrated is a composite electrode with three different electrodes attached to the lead. In the embodiment

illustrated, an optional anchor segment 52 is attached at the most distal end of the subcutaneous electrode for anchoring the electrode into soft tissue such that the electrode does not dislodge after implantation.

5 The most distal electrode on the composite subcutaneous electrode is a coil electrode 27 that is used for delivering the high voltage cardioversion/ defibrillation energy across the heart. The coil cardioversion/defibrillation electrode is about 5-10 cm in length. Proximal to the coil electrode are two sense electrodes, a first sense electrode 25 is located proximally to the coil electrode and a second sense electrode 23 is located proximally to the first sense electrode. The sense electrodes are spaced far enough apart to be able to have good QRS detection. This spacing can range from 1 to 10 cm with 4 cm being presently preferred. The electrodes may or may not be circumferential with the preferred embodiment. Having the electrodes non-circumferential and positioned outward, toward the skin surface, is a means to minimize muscle artifact and enhance QRS signal quality. The sensing electrodes are
20 electrically isolated from the cardioversion/defibrillation electrode via insulating areas 29. Similar types of cardioversion/defibrillation electrodes are currently commercially available in a transvenous configuration. For example, U.S. Patent No. 5,534,022, the entire disclosure of

which is herein incorporated by reference, discloses a composite electrode with a coil cardioversion/defibrillation electrode and sense electrodes. Modifications to this arrangement is contemplated within the scope of the invention.

5 One such modification is illustrated in FIG. 2 where the two sensing electrodes 25 and 23 are non-circumferential sensing electrodes and one is located at the distal end, the other is located proximal thereto with the coil electrode located in between the two sensing electrodes. In this embodiment the sense electrodes are spaced about 6 to about 12 cm apart depending on the length of the coil electrode used. FIG. 3 illustrates yet a further embodiment where the two sensing electrodes are located at the distal end to the composite electrode with the coil electrode located proximally thereto. Other possibilities exist and are contemplated within the present invention. For example, having only one sensing electrode, either proximal or distal to the coil cardioversion/defibrillation electrode with the coil serving as both a sensing electrode and a cardioversion/defibrillation electrode.

20 It is also contemplated within the scope of the invention that the sensing of QRS waves (and transthoracic impedance) can be carried out via sense electrodes on the canister housing or in combination with the cardioversion/defibrillation coil electrode and/or the subcutaneous lead sensing electrode(s). In

this way, sensing could be performed via the one coil electrode located on the subcutaneous electrode and the active surface on the canister housing. Another possibility would be to have only one sense electrode located on the subcutaneous electrode and the sensing would be performed by that one electrode and either the coil electrode on the subcutaneous electrode or by the active surface of the canister. The use of sensing electrodes on the canister would eliminate the need for sensing electrodes on the subcutaneous electrode. It is also contemplated that the subcutaneous electrode would be provided with at least one sense electrode, the canister with at least one sense electrode, and if multiple sense electrodes are used on either the subcutaneous electrode and/or the canister, that the best QRS wave detection combination will be identified when the S-ICD is implanted and this combination can be selected, activating the best sensing arrangement from all the existing sensing possibilities. Turning again to FIG. 2, two sensing electrodes 26 and 28 are located on the electrically active surface 15 with electrical insulator rings 30 placed between the sense electrodes and the active surface. These canister sense electrodes could be switched off and electrically insulated during and shortly after defibrillation/ cardioversion shock delivery. The canister sense electrodes may also be placed on the electrically inactive surface of the canister. In the embodiment of FIG. 2, there are

actually four sensing electrodes, two on the subcutaneous lead and two on the canister. In the preferred embodiment, the ability to change which electrodes are used for sensing would be a programmable feature of the S-ICD to adapt to changes in the patient physiology and size (in the case of children) over time. The programming could be done via the use of physical switches on the canister, or as presently preferred, via the use of a programming wand or via a wireless connection to program the circuitry within the canister.

The canister could be employed as either a cathode or an anode of the S-ICD cardioversion/defibrillation system. If the canister is the cathode, then the subcutaneous coil electrode would be the anode. Likewise, if the canister is the anode, then the subcutaneous electrode would be the cathode.

The active canister housing will provide energy and voltage intermediate to that available with ICDs and most AEDs. The typical maximum voltage necessary for ICDs using most biphasic waveforms is approximately 750 Volts with an associated maximum energy of approximately 40 Joules. The typical maximum voltage necessary for AEDs is approximately 2000-5000 Volts with an associated maximum energy of approximately 200-360 Joules depending upon the model and waveform used. The S-ICD of the present invention uses maximum voltages in the range of about 700 to about 3150 Volts and is associated with energies of about

40 to about 210 Joules. The capacitance of the S-ICD could range from about 50 to about 200 micro farads.

The sense circuitry contained within the canister is highly sensitive and specific for the presence or absence of life threatening ventricular arrhythmias. Features of the detection algorithm are programmable and the algorithm is focused on the detection of V-FIB and high rate V-TACH (>240 bpm). Although the S-ICD of the present invention may rarely be used for an actual life threatening event, the simplicity of design and implementation allows it to be employed in large populations of patients at modest risk with modest cost by non-cardiac electrophysiologists. Consequently, the S-ICD of the present invention focuses mostly on the detection and therapy of the most malignant rhythm disorders. As part of the detection algorithm's applicability to children, the upper rate range is programmable upward for use in children, known to have rapid supraventricular tachycardias and more rapid ventricular fibrillation. Energy levels also are programmable downward in order to allow treatment of neonates and infants.

Turning now to FIG. 4, the optimal subcutaneous placement of the S-ICD of the present invention is illustrated. As would be evidence to a person skilled in the art, the actual location of the S-ICD is in a subcutaneous space that is developed during the implantation process. The heart is not exposed during this

process and the heart is schematically illustrated in the figures only for help in understanding where the canister and coil electrode are three dimensionally located in the left mid-clavicular line approximately at the level of the inframammary crease at approximately the 5th rib. The lead 21 of the subcutaneous electrode traverses in a subcutaneous path around the thorax terminating with its distal electrode end at the posterior axillary line ideally just lateral to the left scapula. This way the canister and subcutaneous cardioversion/defibrillation electrode provide a reasonably good pathway for current delivery to the majority of the ventricular myocardium.

FIG. 5 illustrates a different placement of the present invention. The S-ICD canister with the active housing is located in the left posterior axillary line approximately lateral to the tip of the inferior portion of the scapula. This location is especially useful in children. The lead 21 of the subcutaneous electrode traverses in a subcutaneous path around the thorax terminating with its distal electrode end at the anterior precordial region, ideally in the inframammary crease.

FIG. 6 illustrates the embodiment of FIG. 1 subcutaneously implanted in the thorax with the proximal sense electrodes 23 and 25 located at approximately the left axillary line with the

cardioversion/defibrillation electrode just lateral to the tip of the inferior portion of the scapula.

FIG. 7 schematically illustrates the method for implanting the S-ICD of the present invention. An incision 31 is made in the left anterior axillary line approximately at the level of the cardiac apex. This incision location is distinct from that chosen for S-ICD placement and is selected specifically to allow both canister location more medially in the left inframammary crease and lead positioning more posteriorly via the introducer set (described below) around to the left posterior axillary line lateral to the left scapula. That said, the incision can be anywhere on the thorax deemed reasonably by the implanting physician although in the preferred embodiment, the S-ICD of the present invention will be applied in this region. A subcutaneous pathway 33 is then created medially to the inframammary crease for the canister and posteriorly to the left posterior axillary line lateral to the left scapula for the lead.

The S-ICD canister 11 is then placed subcutaneously at the location of the incision or medially at the subcutaneous region at the left inframammary crease. The subcutaneous electrode 13 is placed with a specially designed curved introducer set 40 (see FIG. 8). The introducer set comprises a curved trocar 42 and a stiff curved peel away sheath 44. The peel away sheath is

curved to allow for placement around the rib cage of the patient in the subcutaneous space created by the trocar. The sheath has to be stiff enough to allow for the placement of the electrodes without the sheath collapsing or bending. Preferably the sheath

5 is made out of a biocompatible plastic material and is perforated along its axial length to allow for it to split apart into two sections. The trocar has a proximal handle 41 and a curved shaft 43. The distal end 45 of the trocar is tapered to allow for dissection of a subcutaneous path 33 in the patient.

10 Preferably, the trocar is cannulated having a central Lumen 46 and terminating in an opening 48 at the distal end. Local anesthetic such as lidocaine can be delivered, if necessary, through the lumen or through a curved and elongated needle designed to anesthetize the path to be used for trocar insertion

15 should general anesthesia not be employed. The curved peel away sheath 44 has a proximal pull tab 49 for breaking the sheath into two halves along its axial shaft 47. The sheath is placed over a guidewire inserted through the trocar after the subcutaneous path has been created. The subcutaneous pathway is

20 then developed until it terminates subcutaneously at a location that, if a straight line were drawn from the canister location to the path termination point the line would intersect a substantial portion of the left ventricular mass of the patient.

The guidewire is then removed leaving the peel away sheath. The

subcutaneous lead system is then inserted through the sheath until it is in the proper location. Once the subcutaneous lead system is in the proper location, the sheath is split in half using the pull tab 49 and removed. If more than one
5 subcutaneous electrode is being used, a new curved peel away sheath can be used for each subcutaneous electrode.

10 The S-ICD will have prophylactic use in adults where chronic transvenous/epicardial ICD lead systems pose excessive risk or have already resulted in difficulty, such as sepsis or lead fractures. It is also contemplated that a major use of the S-ICD system of the present invention will be for prophylactic
15 use in children who are at risk for having fatal arrhythmias, where chronic transvenous lead systems pose significant management problems. Additionally, with the use of standard transvenous ICDs in children, problems develop during patient
20 growth in that the lead system does not accommodate the growth. FIG. 9 illustrates the placement of the S-ICD subcutaneous lead system such that the problem that growth presents to the lead system is overcome. The distal end of the subcutaneous
25 electrode is placed in the same location as described above providing a good location for the coil cardioversion/defibrillation electrode 27 and the sensing electrodes 23 and 25. The insulated lead 21, however is no longer placed in a taught configuration. Instead, the lead is

serpiginously placed with a specially designed introducer trocar and sheath such that it has numerous waves or bends. As the child grows, the waves or bends will straighten out lengthening the lead system while maintaining proper electrode placement.

5 Although it is expected that fibrous scarring especially around the defibrillation coil will help anchor it into position to maintain its posterior position during growth, a lead system with a distal tine or screw electrode anchoring system 52 can also be incorporated into the distal tip of the lead to
10 facilitate lead stability (see FIG. 1). Other anchoring systems can also be used such as hooks, sutures, or the like.

FIGS. 10 and 11 illustrate another embodiment of the present S-ICD invention. In this embodiment there are two subcutaneous electrodes 13 and 13' of opposite polarity to the
15 canister. The additional subcutaneous electrode 13' is essentially identical to the previously described electrode. In this embodiment the cardioversion/defibrillation energy is delivered between the active surface of the canister and the two coil electrodes 27 and 27'. Additionally, provided in the
20 canister is means for selecting the optimum sensing arrangement between the four sense electrodes 23, 23', 25, and 25'. The two electrodes are subcutaneously placed on the same side of the heart. As illustrated in FIG. 6, one subcutaneous electrode 13 is placed inferiorly and the other electrode 13' is placed

superiorly. It is also contemplated with this dual subcutaneous electrode system that the canister and one subcutaneous electrode are the same polarity and the other subcutaneous electrode is the opposite polarity.

5 Turning now to FIGS. 12 and 13, further embodiments are illustrated where the canister 11 of the S-ICD of the present invention is shaped to be particularly useful in placing subcutaneously adjacent and parallel to a rib of a patient. The canister is long, thin, and curved to conform to the shape of
10 the patient's rib. In the embodiment illustrated in FIG. 12, the canister has a diameter ranging from about 0.5 cm to about 2 cm without 1 cm being presently preferred. Alternatively, instead of having a circular cross sectional area, the canister could have a rectangular or square cross sectional area as
15 illustrated in FIG. 13 without falling outside of the scope of the present invention. The length of the canister can vary depending on the size of the patient's thorax. Currently the canister is about 5 cm to about 15 cm long with about 10 being presently preferred. The canister is curved to conform to the
20 curvature of the ribs of the thorax. The radius of the curvature will vary depending on the size of the patient, with smaller radiuses for smaller patients and larger radiuses for larger patients. The radius of the curvature can range from about 5 cm to about 35 cm depending on the size of the patient.

Additionally, the radius of the curvature need not be uniform throughout the canister such that it can be shaped closer to the shape of the ribs. The canister has an active surface, 15 that is located on the interior (concave) portion of the curvature and an inactive surface 16 that is located on the exterior (convex) portion of the curvature. The leads of these embodiments, which are not illustrated except for the attachment port 19 and the proximal end of the lead 21, can be any of the leads previously described above, with the lead illustrated in FIG. 1 being presently preferred.

The circuitry of this canister is similar to the circuitry described above. Additionally, the canister can optionally have at least one sense electrode located on either the active surface of the inactive surface and the circuitry within the canister can be programmable as described above to allow for the selection of the best sense electrodes. It is presently preferred that the canister have two sense electrodes 26 and 28 located on the inactive surface of the canisters as illustrated, where the electrodes are spaced from about 1 to about 10 cm apart with a spacing of about 3 cm being presently preferred. However, the sense electrodes can be located on the active surface as described above.

It is envisioned that the embodiment of FIG. 12 will be subcutaneously implanted adjacent and parallel to the left

anterior 5th rib, either between the 4th and 5th ribs or between the 5th and 6th ribs. However other locations can be used.

Another component of the S-ICD of the present invention is a cutaneous test electrode system designed to simulate the subcutaneous high voltage shock electrode system as well as the QRS cardiac rhythm detection system. This test electrode system is comprised of a cutaneous patch electrode of similar surface area and impedance to that of the S-ICD canister itself together with a cutaneous strip electrode comprising a defibrillation strip as well as two button electrodes for sensing of the QRS. Several cutaneous strip electrodes are available to allow for testing various bipole spacings to optimize signal detection comparable to the implantable system.

Figures 14 to 18 depict particular US-ICD embodiments of the present invention. The various sensing, shocking and pacing circuitry, described in detail above with respect to the S-ICD embodiments, may additionally be incorporated into the following US-ICD embodiments. Furthermore, particular aspects of any individual S-ICD embodiment discussed above, may be incorporated, in whole or in part, into the US-ICD embodiments depicted in the following figures.

Turning now to Fig. 14, the US-ICD of the present invention is illustrated. The US-ICD consists of a curved housing 1211 with a first and second end. The first end 1413 is thicker than

the second end 1215. This thicker area houses a battery supply, capacitor and operational circuitry for the US-ICD. The circuitry will be able to monitor cardiac rhythms for tachycardia and fibrillation, and if detected, will initiate charging the capacitor and then delivering cardioversion/defibrillation energy through the two cardioversion/defibrillating electrodes 1417 and 1219 located on the outer surface of the two ends of the housing. The circuitry can provide cardioversion/defibrillation energy in different types of waveforms. In the preferred embodiment, a 100 uF biphasic waveform is used of approximately 10-20 ms total duration and with the initial phase containing approximately 2/3 of the energy, however, any type of waveform can be utilized such as monophasic, biphasic, multiphasic or alternative waveforms as is known in the art.

The housing of the present invention can be made out of titanium alloy or other presently preferred ICD designs. It is contemplated that the housing is also made out of biocompatible plastic materials that electronically insulate the electrodes from each other. However, it is contemplated that a malleable canister that can conform to the curvature of the patient's chest will be preferred. In this way the patient can have a comfortable canister that conforms to the unique shape of the patient's rib cage. Examples of conforming ICD housings are

provided in U.S. Patent No. 5,645,586, the entire disclosure of which is herein incorporated by reference. In the preferred embodiment, the housing is curved in the shape of a 5th rib of a person. Because there are many different sizes of people, the housing will come in different incremental sizes to allow a good match between the size of the rib cage and the size of the US-ICD. The length of the US-ICD will range from about 15 to about 50 cm. Because of the primary preventative role of the therapy and the need to reach energies over 40 Joules, a feature of the preferred embodiment is that the charge time for the therapy, intentionally be relatively long to allow capacitor charging within the limitations of device size.

The thick end of the housing is currently needed to allow for the placement of the battery supply, operational circuitry, and capacitors. It is contemplated that the thick end will be about 0.5 cm to about 2 cm wide with about 1 cm being presently preferred. As microtechnology advances, the thickness of the housing will become smaller.

The two cardioversion/defibrillation electrodes on the housing are used for delivering the high voltage cardioversion/defibrillation energy across the heart. In the preferred embodiment, the cardioversion/defibrillation electrodes are coil electrodes, however, other cardioversion/defibrillation electrodes could be used such as

having electrically isolated active surfaces or platinum alloy electrodes. The coil cardioversion/defibrillation electrodes are about 5-10 cm in length. Located on the housing between the two cardioversion/defibrillation electrodes are two sense electrodes 1425 and 1427. The sense electrodes are spaced far enough apart to be able to have good QRS detection. This spacing can range from 1 to 10 cm with 4 cm being presently preferred. The electrodes may or may not be circumferential with the preferred embodiment. Having the electrodes non-circumferential and positioned outward, toward the skin surface, is a means to minimize muscle artifact and enhance QRS signal quality. The sensing electrodes are electrically isolated from the cardioversion/defibrillation electrode via insulating areas 1423. Analogous types of cardioversion/defibrillation electrodes are currently commercially available in a transvenous configuration. For example, U.S. Patent No. 5,534,022, the entire disclosure of which is herein incorporated by reference, discloses a composite electrode with a coil cardioversion/defibrillation electrode and sense electrodes. Modifications to this arrangement is contemplated within the scope of the invention. One such modification is to have the sense electrodes at the two ends of the housing and have the cardioversion/defibrillation electrodes located in between the sense electrodes. Another modification is to have three or more

sense electrodes spaced throughout the housing and allow for the selection of the two best sensing electrodes. If three or more sensing electrodes are used, then the ability to change which electrodes are used for sensing would be a programmable feature of the US-ICD to adapt to changes in the patient physiology and size over time. The programming could be done via the use of physical switches on the canister, or as presently preferred, via the use of a programming wand or via a wireless connection to program the circuitry within the canister.

Turning now to Fig. 15, the optimal subcutaneous placement of the US-ICD of the present invention is illustrated. As would be evident to a person skilled in the art, the actual location of the US-ICD is in a subcutaneous space that is developed during the implantation process. The heart is not exposed during this process and the heart is schematically illustrated in the figures only for help in understanding where the device and its various electrodes are three dimensionally located in the thorax of the patient. The US-ICD is located between the left mid-clavicular line approximately at the level of the inframammary crease at approximately the 5th rib and the posterior axillary line, ideally just lateral to the left scapula. This way the US-ICD provides a reasonably good pathway for current delivery to the majority of the ventricular myocardium.

Fig. 16 schematically illustrates the method for implanting the US-ICD of the present invention. An incision 1631 is made in the left anterior axillary line approximately at the level of the cardiac apex. A subcutaneous pathway is then created that extends posteriorly to allow placement of the US-ICD. The incision can be anywhere on the thorax deemed reasonable by the implanting physician although in the preferred embodiment, the US-ICD of the present invention will be applied in this region. The subcutaneous pathway is created medially to the inframammary crease and extends posteriorly to the left posterior axillary line. The pathway is developed with a specially designed curved introducer 1742 (see Fig. 17). The trocar has a proximal handle 1641 and a curved shaft 1643. The distal end 1745 of the trocar is tapered to allow for dissection of a subcutaneous path in the patient. Preferably, the trocar is cannulated having a central lumen 1746 and terminating in an opening 1748 at the distal end. Local anesthetic such as lidocaine can be delivered, if necessary, through the lumen or through a curved and elongated needle designed to anesthetize the path to be used for trocar insertion should general anesthesia not be employed. Once the subcutaneous pathway is developed, the US-ICD is implanted in the subcutaneous space, the skin incision is closed using standard techniques.

As described previously, the US-ICDs of the present invention vary in length and curvature. The US-ICDs are provided in incremental sizes for subcutaneous implantation in different sized patients. Turning now to Fig. 18, a different embodiment is schematically illustrated in exploded view which provides different sized US-ICDs that are easier to manufacture. The different sized US-ICDs will all have the same sized and shaped thick end 1413. The thick end is hollow inside allowing for the insertion of a core operational member 1853. The core member comprises a housing 1857 which contains the battery supply, capacitor and operational circuitry for the US-ICD. The proximal end of the core member has a plurality of electronic plug connectors. Plug connectors 1861 and 1863 are electronically connected to the sense electrodes via pressure fit connectors (not illustrated) inside the thick end which are standard in the art. Plug connectors 1865 and 1867 are also electronically connected to the cardioverter/defibrillator electrodes via pressure fit connectors inside the thick end. The distal end of the core member comprises an end cap 1855, and a ribbed fitting 1859 which creates a water-tight seal when the core member is inserted into opening 1851 of the thick end of the US-ICD.

The core member of the different sized and shaped US-ICD will all be the same size and shape. That way, during an

implantation procedures, multiple sized US-ICDs can be available for implantation, each one without a core member. Once the implantation procedure is being performed, then the correct sized US-ICD can be selected and the core member can be inserted
5 into the US-ICD and then programmed as described above. Another advantage of this configuration is when the battery within the core member needs replacing it can be done without removing the entire US-ICD.

FIG. 14(a) illustrates an embodiment of the subcutaneous
10 lead electrode or "lead electrode assembly" 100. The lead electrode assembly 100 is designed to provide an electrode 107 to be implanted subcutaneously in the posterior thorax of a patient for delivery of cardioversion/defibrillation energy. The lead electrode assembly 100 is further designed to provide a
15 path for the cardioversion/defibrillation energy to reach the electrode 107 from the operational circuitry within the canister 11 of an S-ICD such as the embodiment shown in FIG. 1.

The lead electrode assembly 100 comprises a connector 111,
20 a lead 21, a lead fastener 146, an electrode 107 and an appendage 118. The connector 111 is connected to the lead 21. The lead 21 is further connected to the electrode 107 with the lead fastener 146. The appendage 118 is mounted to the electrode 107.

The connector 111 provides an electrical connection between the lead 21 and the operational circuitry within the canister 11 of an S-ICD such as the embodiment shown in FIG. 1. Connector 111 is designed to mate with the connection port 19 on the canister 11. In the embodiment under discussion, the connector 111 meets the IS-1 standard.

The lead 21 of the lead electrode assembly 100 provides an electrical connection between the connector 111 and the electrode 107. The lead 21 comprises a distal end 101 and a proximal end 102. The distal end 101 of the lead 21 is attached to the connector 111. The proximal end 102 of the lead 21 is attached to electrode 107 with the lead fastener 146.

The lead 21 has a lead length, l_{Lead} , measured from the connector 111 along the lead 21 to the lead fastener 146 of the electrode 107. The length of the lead 21 is approximately 25 cm. In alternative embodiments, the lead lengths range between approximately 5 cm and approximately 52 cm.

The lead fastener 146 provides a robust physical and electrical connection between the lead 21 and the electrode 107.

The lead fastener 146 joins the proximal end 102 of the lead 21 to electrode 107.

The electrode 107 comprises an electrically conductive member designed to make contact with the tissue of the patient and transfer cardioversion/defibrillation energy to the tissue of the patient from the S-ICD canister 11.

10 The electrode 107 illustrated is generally flat and planar, comprising a top surface 110, a bottom surface 115, a distal end 103 and a proximal end 104. The lead fastener 146 is attached to the top surface 110 of the distal end 103 of the electrode 107.

15 The electrode 107 may have shapes other than planar. In an alternate embodiment, the electrode 107 is shaped like a coil.

20 The appendage 118 is a member attached to the electrode 107 that can be gripped and used to precisely locate the lead electrode assembly 100 during its surgical implantation within the patient.

The appendage 118 has a first end 105, a second end 106, a distal edge 121 and a proximal edge 129. The second end 106 of

the appendage 118 is attached to the top surface 110 of the electrode 107. The appendage 118 is positioned such that its proximal edge 129 is within approximately 20 mm of the proximal end 104 of the electrode 107. In alternate embodiments, the
5 appendage 118 is attached to the electrode 107 in other positions.

It is useful at this point, to set out several general definitions for future reference in discussing the dimensions and placement of appendages 118.
10

The appendage height, $h_{\text{Appendage}}$, is defined as the distance from the point of the appendage 118 most distant from the electrode 107 to a point of the appendage 118 closest to the electrode 107 measured along a line perpendicular to the top surface 110 of the electrode 107. The appendage height of the
15 appendage 118 illustrated, for example, would be measured between the first end 105 of the appendage 118 and the second end 106 of the appendage 118.

20

The appendage height of the appendage 118 illustrated is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately
10 mm.

The appendage interface is defined as the part of the appendage 118 that joins it to the electrode 107. The appendage interface of the appendage 118 illustrated, for example, would
5 be the second end 106 of the appendage 118.

The appendage length, $l_{\text{Appendage}}$, is the length of the appendage 118 along the appendage interface. The appendage interface of the appendage 118 illustrated, for example, would
10 be the length of the second end 106 of the appendage 118.

The appendage length of the appendage 118 illustrated in FIG. 14 is approximately 1 cm. In alternative embodiments, appendage lengths range between approximately 2 mm and
15 approximately 6 cm. In an alternate embodiment, the appendage 118 is substantially as long as the electrode 107.

More particularly, the appendage 118 of the embodiment illustrated is a fin 120 comprising a fin core 122 (phantom
20 view) and a coating 125.

The fin core 122 generally provides support for the fin 120. The fin core 122 has a first end 126 and a second end 127.

The second end 127 of the fin core 122 is attached to the top surface 110 of the electrode 107.

The fin core 122 comprises a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the fin core 122 comprises any rugged material that can be attached to the first surface 110 of the electrode 107.

10
The coating 125 is disposed around the fin core 122. The coating 125 provides a surface for the fin 120 that can be easily gripped during the implantation of the lead electrode assembly 100. The coating 125 covering the fin core 122 is composed of molded silicone. In an alternative embodiment, the coating 125 may be any polymeric material. In this specification, the term polymeric material includes the group of materials consisting of a polyurethane, a polyamide, a polyeteretherketone (PEEK), a polyether block amide (PEBA), a
20 polytetrafluoroethylene (PTFE), a silicone and mixtures thereof.

In one embodiment, the fin 120 is reinforced with a layer of Dacron[®] polymer mesh attached to the inside of the coating 125. Dacron[®] is a registered trademark of E.I. du Pont de

Nemours and Company Corporation, Wilmington, DE. In another embodiment, the Dacron® polymer mesh attached to the outside of the coating 125. In another embodiment, the fin 120 is reinforced with a layer of any polymeric material.

5

FIG. 14(b) illustrates a top view of the lead electrode assembly 100. The electrode 107 is substantially rectangular in shape, comprising a first pair of sides 108, a second pair of sides 109 and four corners 112. In an alternative embodiment the electrode 107 has a shape other than rectangular. In this embodiment, the corners 112 of the electrode 107 are rounded. In an alternative embodiment the corners 112 of the electrode 107 are not rounded.

The first pair of sides 108 of the electrode 107 are substantially linear, substantially parallel to each other and are approximately 1 cm in length. The second pair of sides 109 of the electrode 107 are also substantially linear, substantially parallel with each other and are approximately 5 cm in length. The bottom surface 115 of the electrode 107 has an area of approximately 500 square mm. In alternative embodiments, the first pair of sides 108 and the second pair of sides 109 of the electrode 107 are neither linear nor parallel.

In alternative embodiments, the length of the first pair of sides 108 and second pair of sides 109 of the electrode 107 range independently between approximately 1 cm and approximately 5 cm. The surface area of the bottom surface 115 of the electrode 107 ranges between approximately 100 sq. mm and approximately 2000 sq. mm. In one embodiment, the first pair of sides 108 and second pair of sides 109 of the electrode 107 are linear and of equal length, such that the electrode 107 is substantially square-shaped.

10
09940356-082701
15
The electrode 107 comprises a sheet of metallic mesh 114 further comprised of woven wires 119. The metallic mesh 114 comprises a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the metallic mesh 114 comprises any conductive material.

20
In an alternate embodiment, the electrode 107 comprises a solid metallic plate. The metallic plate comprises a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the solid plate comprises any conductive material.

The metallic mesh 114 is approximately a 150 mesh, having approximately 150 individual wires 119 per inch. In alternative embodiments, the metallic mesh 114 ranges between approximately a 50 mesh and approximately a 200 mesh. In this embodiment, the diameter of the wires 119 of the mesh is approximately 1 mil. In alternative embodiments, the diameter of the wires 119 ranges between approximately 1 and approximately 5 mils.

10 The metallic mesh 114 is first prepared by spot welding together the wires 119 located along the first pair of sides 108 and second pair of sides 109 of the metallic mesh 114. The excess lengths of wires are then ground or machined flush, so as to produce a smooth edge and to form a smooth border 113. In an alternate embodiment, the wires 119 located along the first pair of sides 108 and second pair of sides 109 of the metallic mesh 114 are bent in toward the metallic mesh 114 to form a smooth border 113.

20 The fin 120 is attached to the top surface 110 of the electrode 107 in a position centered between the first pair of sides 108 of the electrode 107. In other embodiments, the fin 120 is not centered between the first pair of sides 108 of the electrode 107.

The fin 120 is planar shape comprising a first face 191 and a second face 192. The first face 191 and the second face 192 of the fin 120 are substantially parallel to the first pair of sides 108 of the electrode 107. In other embodiments, the first face 191 and the second face 192 of the fin 120 are positioned in orientations other than parallel to the first pair of sides 108 of the electrode 107.

The first face 191 and the second face 192 of the fin 120 extend from and substantially perpendicular to the top surface 110 of the electrode 107. In an alternative embodiment, the first face 191 and the second face 192 of the fin 120 extend from the top surface 110 of the electrode 107 at other than right angles.

The fin core 122 of the fin 120 is spot welded to the metallic mesh 114 comprising the electrode 107. In another embodiment, the fin 120 may be composed entirely of a polymeric material and attached to the electrode 107 by means known in the art.

FIG. 14(c) illustrates in detail a section of the lead 21 of this embodiment. The lead 21 comprises an electrically insulating sheath 141 and an electrical conductor 142.

The electrically insulating sheath 141 is disposed around the electrical conductor 142 (phantom view). The electrically insulating sheath 141 prevents the cardioversion/defibrillation energy passing through the electrical conductor 142 to the electrode from passing into objects surrounding the lead 21. The electrically insulating sheath 141, comprises a tube 149 disposed around the electrical conductor 142. The tube is composed of either silicone, polyurethane or composite materials. One skilled in the art will recognize that the tube 149 could alternately be composed of any insulating, flexible, bio-compatible material suitable to this purpose.

In this embodiment, the electrical conductor 142 comprises three highly-flexible, highly-conductive coiled fibers known as filars 147 (phantom view). These fibers are wound in a helical shape through the electrically insulating sheath 141. In an alternate embodiment, the filars lie as linear cables within the electrically insulating sheath 141. In another alternate embodiment, a combination of helically coiled and linear filars lie within the electrically insulating sheath 141.

FIG. 14(d) illustrates a cross-section of a filar 147. The filars 147 of the embodiment illustrated comprise a metal core

144, a metal tube 143 and an insulating coating 140. The metal tube 143 is disposed around the metal core 144. The insulating coating 140 is disposed around the metal tube. The metal core 144 is made of silver and the metal tube 143 is made of MP35N[®] stainless steel, a product of SPS Technologies of Jenkintown, PA. The insulating coating 140 is made of teflon. The filars 147 of this structure are available as DFT[™] (drawn filled tube) conductor coil, available from Fort Wayne Metals Research Products Corp. of Fort Wayne, Indiana.

In an alternative embodiment, the filars 147 further comprise an intermediate coating (not shown) disposed between the metal tube 143 and the insulating coating 140. This intermediate coating is made of platinum, iridium ruthenium, palladium or an alloy of these metals.

In another alternative embodiment, the filars 147 comprise DBS[™] (drawn braised strands) also available from Fort Wayne Metals Research Products Corp. of Fort Wayne, Indiana.

Turning now to FIG. 14(e), a cross section of the lead fastener 146 is shown in detail. The lead fastener 146 provides a robust physical and electrical connection between the lead 21 and the electrode 107.

In this embodiment, the lead fastener 146 comprises a metal strip 157, a crimping tube 154 and a crimping pin 156. The metal strip 157 has a first end 150, a second end 151, and a middle portion 152. The first end 150 and second end 151 of the metal strip 157 are separated by the middle portion 152. The first end 150 and second end 151 of the metal strip 157 are attached to the electrode 107. In this embodiment, the first end 150 and second end 151 of the lead fastener 146 are spot welded to the top surface 110 of the metallic mesh 114 comprising the electrode 107. In other embodiments, other fastening methods known in the art can be used.

The middle portion 152 of the metal strip 157 is raised away from the electrode 107 to permit the crimping tube 154 and electrically insulating sheath 141 of the lead 21 to fit between the metal strip 157 and the electrode 107.

The middle portion 152 of the metal strip 157 contains a crimp point 148. The crimp point 148 squeezes the crimping tube 154 and electrically insulating sheath 141 of the lead 21 thereby gripping it, and thereby providing a robust structural connection between the lead 21 and the electrode 107.

The filars 147 of the lead 21 are situated between the crimping tube 154 and crimping pin 156. The crimping tube 154 has a crimping point 155 which causes the filars 147 to be squeezed between crimping tube 154 and crimping pin 156. A gap 5 159 in the electrically insulating sheath 141 allows the crimping tube 155 to make contact the electrode 107, thereby forming a robust electrical connection.

10 The metal strip 157, the crimping tube 154 and crimping pin 156 are each made of platinum iridium. In an alternative embodiment, the metal strip 157, crimping tube 154 and crimping pin 156 are each made of a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. 15 In an alternative embodiment, the metal strip 157, crimping tube 154 and crimping pin 156 are each made of any conductive material.

20 FIG. 14(f) illustrates an exploded view of the lead fastener 146. In other embodiments, other types of lead fasteners 146 known in the art are used.

FIG. 15(a) illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially

similar to the lead electrode assembly 100 illustrated in FIGS. 14(a)- 14(f). In this embodiment, however, the appendage 118 lacks a fin core 122. Moreover, as seen in FIG. 15(a) the lead electrode assembly 100 of this embodiment further comprises a backing layer 130 and stitching 139. The backing layer 130 acts to insulate the electrode 107 so that cardioversion/defibrillation energy may not pass to the tissue of the patient that surrounds the top surface 110 of the electrode 107. This has the effect of focusing the cardioversion/defibrillation energy toward the heart of the patient through the bottom surface 115 of the electrode 107.

The backing layer 130 comprises a base portion 158 and an integrated fin 120. The base portion 158 of the backing layer 130 comprises a first surface 131, a second surface 132, a first side 133 and a second side 134.

The base portion 158 of the backing layer 130 is attached to the electrode 107 such that the second surface 132 of the backing layer 130 lies directly adjacent to the top surface 110 of the electrode 107.

The base portion 158 of the backing layer 130 is formed so that the first side 133 and the second side 134 are

substantially parallel and of substantially the same size as the first pair of sides 108 of the electrode 107.

FIG. 15(b) illustrates a top view of the lead electrode assembly 100 of this embodiment. The base portion 158 of the backing layer 130 further comprises a distal end 137 and a proximal end 138.

The distal end 137 and proximal end 138 of the backing layer 130 are parallel to and of substantially the same size as the second pair of sides 109 (hidden) of the electrode 107. The backing layer 130 contains a notch 136 on its distal end 137, through which the lead fastener 146 rises.

The base portion 158 of the backing layer 130 is attached to the electrode 107 with stitching 139. The stitching is composed of nylon. In alternate embodiments, the stitching is composed of any polymeric material.

The backing layer 130 is composed of polyurethane. In an alternative embodiment, the backing layer is composed of molded silicone, nylon, or Dacron®. In alternative embodiments, the backing layer is composed of any polymeric material.

The integrated fin 120 of the backing layer 130 is formed from the same piece of material as the backing layer 130. The integrated fin 120 has the same shape and dimensions as the fin 120 of the embodiment in FIG. 14.

5

In one embodiment, the integrated fin 120 is reinforced with a layer of Dacron® polymer mesh attached to the integrated fin 120. In another embodiment, the integrated fin 120 is reinforced with a layer of any polymeric material.

FIG. 16(a) illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the lead electrode assembly 100 illustrated in FIGS. 14(a)-14(e). In this embodiment, however, the fin 120 has a different construction.

Here, fin 120 comprises a first fin section 165, a second fin section 160 and stitching 168. The first fin section 165 is a rectangular sheet of polymeric material comprising an inside face 167, an outside face 166, a first side 175 and a second side 174. The first side 175 and second side 174 of the first fin section 165 are substantially parallel and of substantially the same size.

A line 173 divides the first fin section 165 into a first half 171 and a second half 172. The line 173 runs parallel to the first side 175 of the first fin section 165. The first half 171 of the first fin section 165 lies on one side of line 173. 5 The second half 172 of the first fin section 165 lies on the other side of the line 173.

The second fin section 160 is a rectangular sheet of polymeric material of the same size as the first fin section 165 comprising an inside face 162 and an outside face 161. The second fin section 160 is divided in half substantially similarly to the first fin section 165, thereby forming a first half 163 and a second half 164 of the second fin section 160.

In an alternate embodiment, the first fin section 165 and second fin section are not rectangular in shape. In an alternate embodiment, the first fin section 165 and second fin section have an oval shape.

20 The first half 171 of the first fin section 165 is fastened to the first half 163 of the second fin section 160. The inside face 167 of the first half 171 of the first fin section 165 faces the inside face 162 of the first half 163 of the second

fin section 160. The first fin section 165 is fastened the second fin section 160 with stitching 168.

5 The fin 120 is attached to the top surface 110 of the electrode 107. To accomplish this, the second half 172 of the first fin section 165 is attached to the top surface 110 of the electrode 107 with the stitching 169. The second half 164 of the second fin section 160 is similarly attached to the top surface 110 of the electrode 107 with stitching (not shown).

10 In one embodiment, the fin 120 is reinforced with a layer of Dacron® polymer mesh positioned between the first fin section 165 and the second fin section 160 of the integrated fin 120. In another embodiment, the Dacron® polymer mesh is attached only to the first fin section 165 or the second fin section 160. In other embodiments, the integrated fin 120 is reinforced with a layer of any polymeric material attached to either or both fin sections.

20 The appendage height of the fin 120 in this embodiment is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately 10 mm. The appendage length of the fin 120 in this embodiment is

approximately 1 cm. In alternative embodiments, appendage lengths range between approximately 2 mm and approximately 6 cm. In one embodiment, the appendage length of the fin 120 is such that the fin 120 is substantially as long as the electrode 107.

5

FIG. 17(a) illustrates a side plan view of an alternative embodiment of the lead electrode assembly 100. The lead electrode assembly 100 comprises a connector 111, a lead 21, a lead fastener 146, an electrode 107, a backing layer 130 with an integrated fin tab 180, a molded cover 220 and an appendage 118.

The connector 111 is connected to the lead 21. The lead 21 is further connected to the electrode 107 with the lead fastener 146. The backing layer 130 is positioned over the electrode 107. The fin tab 180 protrudes from the backing layer 130. The molded cover 220 is disposed around the lead fastener 146 and the backing layer 130. The molded cover 220 is further disposed around the fin tab 180 of the backing layer 118 to form the appendage 118. The molded cover 220 also partially envelops the electrode 107.

The connector 111 and the lead 21 are substantially similar to the connector 111 and the lead 21 described with reference to FIGS. 14(a)-14(f). The lead comprises a distal end 101 and a

proximal end 102. The distal end 101 of the lead 21 is attached to the connector 111. The proximal end 102 of the lead 21 is connected to the electrode 107 by the lead fastener 146.

5 In this embodiment, the lead fastener 146 comprises a first crimping tube 200, a crimping pin 202 and a second crimping tube 201. The first crimping tube 200 connects the proximal end 102 of the lead 21 to the crimping pin 202. The second crimping tube 201 connects the crimping pin 202 to the electrode 107.

10 The electrode 107 comprises a distal end 103 (phantom view), a proximal end 104, a top surface 110 and a bottom surface 115. The electrode further comprises three sections: a main body 217, a mandrel 219 and a mandrel neck 218.

15
20 The main body 217 of the electrode 107 is the region of the electrode 107 that makes contact with the tissue of the patient and transfers the cardioversion/defibrillation energy to the patient. This region is substantially rectangular, comprising a first pair of sides 108 (not shown) and a second pair of sides 109. The first pair of sides 108 of the electrode 107 are substantially parallel to each other. The second pair of sides 109 of the electrode 107 are also substantially parallel to each other. In another embodiment, the first pair of sides 108 and

the second pair of sides 109 of the electrode 107 are non-parallel. The main body 217 of the electrode 107 is positioned under the backing layer 130, so that the top surface 110 of the electrode faces the backing layer 130.

5

The mandrel 219 is a region of the electrode 107 shaped to facilitate the connection of the electrode 107 to the lead 21 via the lead fastener 146. The mandrel of the electrode is crimped onto to the crimping pin 202 of the lead fastener 146 with the second crimping tube 201, so that a robust physical and electrical connection is formed. The main body 217 of the electrode 107 is connected to the mandrel 219 of the electrode 107 via the mandrel neck 218 of the electrode 107.

The backing layer 130 comprises a base portion 158 and an integrated fin tab 180. The base portion 158 of the backing layer 130 comprises a first surface 131, a second surface 132, a distal end 137 and a proximal end 138.

20 The base portion 158 of the backing layer 130 is positioned such that its second surface 132 is adjacent to the top surface 110 of the electrode 107. The base portion 158 of the backing layer 130 is sized and positioned so that the distal end 137 and proximal end 138 of the base portion 158 of the backing layer

130 overlay the second pair of sides 109 of the main body 217 of the electrode 107. The distal end 137 and proximal end 138 of the are also substantially parallel and of substantially the same size as the second pair of sides 109 of the electrode 107.

5

The integrated fin tab 180 of the backing layer 130 is formed from the same piece of material as the base portion 158 of the backing layer 130. The integrated fin tab 180 is formed on the first surface 131 of the base portion 158 of the backing layer 130.

The integrated fin tab 180 comprises a proximal edge 183, a distal edge 184, a top 185 and a bottom 186. The bottom 186 of the integrated fin tab 180 is joined to the first surface 131 of the base portion 158 of the backing layer 130. The proximal edge 183 and the distal edge 184 of the integrated fin tab 180 extend from, and substantially perpendicular to the first surface 131 of the base portion 158 of the backing layer 130. The proximal edge 183 and distal edge 184 of the integrated fin tab 180 are parallel with each other. The integrated fin tab 180 is positioned so that its proximal edge 183 is substantially flush with the proximal end 138 of the base portion 158 of the backing layer 130.

The backing layer 130 is composed of polyurethane. In an alternative embodiment, the backing layer 130 is composed of silicone. In another alternative embodiment, the backing layer 130 is composed of any polymeric material.

5

The molded cover 220 envelops and holds together the components of the lead electrode assembly 100. The molded cover 220 also provides rigidity to the lead electrode assembly 100. The molded cover 220 envelops the lead fastener 146 and the backing layer 130. The fin 120 is formed when the molded cover 220 covers the fin tab 180. The thickness of the resulting fin 120 is approximately 2 mm. In alternate embodiments, the thickness of the fin 120 is between approximately 1 mm and approximately 3 mm.

The appendage height of the fin 120 in this embodiment is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately 10 mm. The appendage length of the fin 120 in this embodiment is approximately 1 cm. In alternative embodiments, appendage lengths range between approximately 2 mm and approximately 6 cm. In one embodiment, the appendage length of the fin 120 is such that the fin is as long as the backing layer. In one embodiment, the appendage length of the fin 120 is such that the

fin is as long as the electrode 107. In one embodiment, the appendage length of the fin 120 is such that the fin is as long as the molded cover 220.

5 The molded cover 220 also partially covers the bottom surface 115 of the electrode 107. In this way, the molded cover 220 attaches the backing layer 130 to the electrode 107.

10 The molded cover 220 in this embodiment is made of silicone. In an alternate embodiment, the molded cover 220 is made of any polymeric material. Stitching 360 holds the molded cover 220, the electrode 107 and the backing layer 130 together.

15 In one embodiment, the fin 120 is reinforced with a layer of Dacron® polymer mesh positioned between the molded cover 220 and the integrated fin tab 180. In another embodiment, the Dacron® polymer mesh is attached only to the molded cover 220. In other embodiments, the fin 120 is similarly reinforced with a layer of any polymeric material.

20

As shown in FIG. 17(b), the fin 120 of the embodiment illustrated in FIG. 17(a) can alternately have a sloped shape. The sloped shape can reduce the resistance offered by the tissue of the patient as it slides against the fin 120 during the

insertion of the lead electrode assembly 100 into the patient. The slope-shaped fin 120 is constructed so that the proximal edge 183 and distal edge 184 of the integrated fin tab 180 are not parallel with each other. Instead, proximal edge 183 of the integrated fin tab 180 can be curved so that the proximal edge 183 of the integrated fin tab 180 is closer to the proximal edge 184 at the top 185 of the integrated fin tab 180, than at the bottom 186 of the integrated fin tab 180. In alternate embodiments, the proximal edge 183 of the integrated fin tab 180 is not curved. Instead, the proximal edge 183 of the integrated fin tab 180 is straight, and forms an acute angle with the first surface 131 of the backing layer 130. In one alternate embodiment, the proximal edge 183 of the integrated fin tab 180 forms a 45 degree angle with the first surface 131 of the backing layer 130. In alternate embodiments, the distal edge 184 of the integrated fin tab 180 is curved. In alternate embodiments, the distal edge 184 of the integrated fin tab 180 is straight and shaped so that it forms an acute angle with the first surface 131 of the backing layer 130.

20

FIG. 17(c) illustrates a front plan view of the lead electrode assembly 100 seen in FIG. 17(a). The base portion 158 of the backing layer 130 further comprises a first side 133 and second side 134. The first side 133 and second side 134 of the

base portion 158 of the backing layer 130 are substantially parallel. In an alternate embodiment, the first side 133 and second side 134 of the backing layer 130 are not parallel. The base portion 158 of the backing layer 130 is sized so that it is substantially the same size and shape as the main body 217 of the electrode 107.

10 The integrated fin tab 180 of the backing layer 130 is planar, comprising a first face 181 and a second face 182. The first face 181 and second face 182 of the fin tab 180 are substantially parallel with each other and with the first side 133 and second side 134 of the backing layer 130. The first face 181 and second face 182 of the fin tab 180 extend from, and substantially perpendicular to the first surface 131 of the backing layer 130. In another embodiment, the first face 181 and second face 182 of the fin tab 180 extend from the first surface 131 of the backing layer 130 at angles other than a right angle.

20 In an alternate embodiment, the first face 181 and a second face 182 of the integrated fin tab 180 of the backing layer 130 are not substantially parallel to each other. Instead, they are angled, such that they are closer together at the top 185 than they are at the bottom 186 of the integrated fin tab 180. This

shape can reduce the resistance offered by the tissue of the patient as it slides against the fin 120 during the insertion of the lead electrode assembly 100 into the patient.

5 In another embodiment, the first face 181 and a second face 182 of the integrated fin tab 180 of the backing layer 130 are angled, such that they are further apart at the top 185 than they are at the bottom 186 of the integrated fin tab 180. This shape can make the fin 120 easier to grip with a tool, such as a hemostat.

10 The fin tab 180 extends from the backing layer 130 at a position centered between the first side 133 and the second side 134 of the backing layer 130. In an alternate embodiment, the fin tab 180 is not centered between the first side 133 and the second side 134 of the backing layer 130.

15 An eyelet 301 is formed in the fin 120 of this embodiment. The eyelet can be used to facilitate the capture of the lead electrode assembly by a tool. The eyelet is formed as a hole 20 225 through the molded cover 220 and between the faces 181 and 182 of fin tab 180. In an alternate embodiment, no eyelet is formed in the fin 120.

The bottom surface 115 of the electrode 107 comprises a periphery 213 and a center 211. The molded cover 220 forms a skirt 222 around the periphery 213 of the bottom surface 115 of the electrode 107. The skirt 222 of the molded cover 220 covers the periphery 213 of the bottom surface 115 of the electrode 107.

10 The skirt 222 of the molded cover 220 can act to focus cardioversion/defibrillation energy emitted from the electrode 107 of the lead electrode assembly 100 toward the heart of the patient. Because the thorax of a patient is surrounded by a layer of fat that is somewhat conductive, the cardioversion /defibrillation energy may tend to arc through this layer to reach the active surface 15 of the canister 11 (seen in FIG. 1) without passing through the patient's heart. The skirt 222 of the lead electrode assembly 100 acts to minimize the loss of cardioversion /defibrillation energy to surrounding body tissues, or from being diverted away from the patient's heart.

20 The center 211 of the bottom surface 115 of the electrode 107 is not covered by the molded cover 220 and is left exposed. The width of the periphery 213 of the bottom surface 115 of the electrode 107 covered by the molded cover 220 is approximately .125 cm.

The area of the exposed center 211 of the bottom surface 115 of the electrode 107 is approximately 500 square mm. In alternative embodiments, the length of the first pair of sides 108 and the second pair of sides 109 of the electrode 107 vary, such that the area of the center 211 of the bottom surface 115 of the electrode has a surface area between approximately 100 sq. mm. and approximately 2000 sq. mm.

FIG. 17(d) illustrates an exploded top view of the lead fastener 146 of the embodiments illustrated in FIGS. 17(a)-17(c). The lead fastener connects the proximal end 102 of the lead 21 and the distal end 103 of the electrode 107.

In this embodiment, the lead fastener 146 comprises a first crimping tube 200, a crimping pin 202 and a second crimping tube 201. The crimping pin 202 comprises a first side 203 and a second side 204.

The crimping tube 200 crimps the filars 147 of the lead 21 (here, only one representative filar 147 is shown) to the first side 203 of crimping pin 202. The mandrel 219 of the electrode 107 is then wrapped around the second side 204 of the crimping

pin 202. Crimping tube 201 crimps the mandrel 219 to the second side 204 of the crimping pin 202.

The first crimping tube 200, the second crimping tube 201 and the crimping pin 202 are each made of platinum iridium. In an alternative embodiment, the first crimping tube 200, the second crimping tube 201 and the crimping pin 202 are each made of a metal selected from the group consisting essentially of titanium, nickel alloys, stainless steel alloys, platinum, platinum iridium, and mixtures thereof. In other embodiments, the first crimping tube 200, the second crimping tube 201 and the crimping pin 202 each comprise any conductive material.

The electrode 107 in this embodiment comprises a sheet of metallic mesh 206 prepared by the process described with reference to FIG. 14. The electrode 107 has a width measured parallel to the second pair of sides 109 of the electrode 107. The width of the mandrel neck 218 of the electrode 107 is approximately 3 mm wide. The width of the mandrel of the electrode 107 is approximately 5 mm wide.

The first pair of sides 108 of the electrode 107 are approximately 5 cm in length. The second pair of sides 109 of the electrode 107 are approximately 1.9 cm in length. In

alternative embodiments, the length of the first pair of sides 108 and the second pair of sides 109 of the electrode 107 range independently from approximately 1 cm to approximately 5 cm.

5 The electrode 107 of this embodiment further comprises four corners 112. The corners 112 of the electrode 107 are rounded. In an alternate embodiment, the corners 112 of the electrode 107 are not rounded.

10 FIGS. 17(e)-17(g) illustrate the size and position of the fin 120 on the molded cover of the lead electrode assembly 100.

15 FIGS. 18(a)-18(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). In this embodiment, however, the appendage height of the fin 120 is approximately 1 cm. The appendage length of the fin 120 in this embodiment is approximately 3.5 cm.

20 As shown in FIG. 18(a), stitching 302 is placed through the molded cover 220 and the fin 120 to prevent the molded cover 220 from sliding off the fin tab 180 when the molded cover 220 is subjected to a force directed away from the electrode 107.

As shown in FIG. 18(c), the fin 120 (phantom view) extends approximately two thirds of the length of the electrode 107.

FIG. 19 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). In this embodiment, however, the backing layer 130 (not shown) inside the molded cover 220 is curved. This results in an electrode 107 that has a curvature of radius r , such that the bottom surface 115 of the electrode 107 is concave.

Because a curved electrode 107 may more closely approximate the curvature of the patient's ribs, this curvature may have the effect of making the lead electrode assembly 100 more comfortable for the patient. In one embodiment, the radius r of the curvature varies throughout the electrode 107 such that it is intentionally shaped to approximate the shape of the ribs. Lead electrode assemblies 100 can be custom manufactured with an electrode 107 with a curvature r that matches the curvature of the intended patient's ribcage in the vicinity of the ribcage adjacent to which the electrode 107 is to be positioned.

In an alternative embodiment, lead electrode assemblies 100 are manufactured with an electrode 107 with a radius r that

matches the curvature of the ribcage of a statistically significant number of people.

In another embodiment, lead electrode assemblies 100 with 5 electrodes 107 of varying curvatures can be manufactured to allow an electrode radius r to be selected for implantation based on the size of the patient. Smaller radii can be used for children and for smaller adult patients. Larger radii can be used for larger patients. The radius r of the curvature can range from approximately 5 cm to approximately 35 cm depending on the size of the patient.

In an alternative embodiment, the electrode 107 of the lead electrode assembly 100 is flexible, such that it can be bent to conform to the curvature of the intended patient's rib cage at the time of implantation.

FIGS. 20(a)-20(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). In this embodiment, however, the backing layer 130 lacks an integrated fin tab 180 mounted on the first surface 131 of the backing layer 130. Moreover, this embodiment further comprises a backing layer 400 having a fin tab 405.

FIGS. 20(a) and 20(b) illustrate only the backing layer 400, the fin tab 405 and the electrode 107 of this embodiment as they are positioned relative to each other in the complete 5 embodiment. Other components of the embodiment are not shown. FIG. 20(c) shows the embodiment in a complete form.

FIG. 20(a) illustrates a top plan view of the backing layer 400 and the electrode 107. The backing layer 400 is positioned over the electrode 107. The electrode 107 of this embodiment is substantially similar to the electrode 107 of the embodiment illustrated in FIG. 17(d). In the complete embodiment, the mandrel 219 of the electrode 107 is joined to the lead 21 (not shown) by a lead fastener 146 (not shown) as shown in FIG. 17(a).

The backing layer 400 is a flat, planar member comprising a distal end 137 and a proximal end 138. The backing layer 400 further comprises a first side 133, a second side 134, a first 20 surface 131, and a second surface 132 (not shown). The backing layer 400 further comprises a width, W, measured as the distance between the first side 133 and the second side 134.

The backing layer 400 includes a fin tab 405 that is formed from the same piece of material as the backing layer 400. The first side 133 of the backing layer 400 lies over one of the first pair of sides 108 of the electrode 107 except over a fin tab region 407. In the fin tab region 407, the backing layer 400 is wider than the electrode 107. In the fin tab region 407, the first side 133 forms a fin tab 405 that protrudes from part of the first side 133 of the backing layer 400 outside the fin tab region 407. The fin tab 405 extends from the first side 133 of the backing layer 400 in an orientation substantially parallel to the top surface 110 of the electrode 107, beyond the first side 108 (phantom view) of the electrode 107.

The fin tab 405 comprises a first face 410 and a second face 411 (not shown). The first face 410 of the fin tab 405 is an extension of the first surface 131 of the backing layer 400. The second face 411 of the fin tab 405 is an extension of the second surface 132 of the backing layer 400.

Aside from the fin tab 405, the backing layer 405 is formed so that it is of substantially the same size and shape as the main body 217 of the electrode 107.

The backing layer 400, including the fin tab 405, is composed of polyurethane. In an alternate embodiments the backing layer 400 and fin tab 405 are composed of any polymeric material.

5

FIG 20(b) is a side plan view of the backing layer 400 and the electrode 107. The backing layer 400 is positioned over the electrode 107 such that the second surface 132 of the backing layer 400 is placed adjacent to the top surface 110 of the electrode 107.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
220

embodiments, the fin 424 is similarly reinforced with a layer of any polymeric material.

The appendage height, $h_{\text{Appendage}}$, of the fin 424 of this embodiment is approximately 5 mm. In alternative embodiments, the appendage heights range between approximately 1 mm and approximately 10 mm. The appendage length, $L_{\text{Appendage}}$, of the fin 424 of this embodiment is measured between the proximal end 404 and the distal end 403 of the fin 424. $L_{\text{Appendage}}$ is measured where the fin 424 joins the rest of the lead electrode assembly 100. In this embodiment, the appendage length is approximately 1 cm. In alternative embodiments, the appendage lengths range between approximately 2 mm and approximately 6 cm. In one embodiment, the appendage length of the fin 424 is such that the fin 424 runs the length of the electrode 107. In one embodiment, the appendage length of the fin 424 is such that the fin 424 runs the length of the backing layer 130 (not shown). In one embodiment, the appendage length of the fin 424 is such that the fin 424 runs the length of the molded cover 220.

FIG. 20(d) illustrates a bottom plan view of an alternate embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the lead electrode assembly 100 illustrated in FIGS. 20(a)-20(c). In this embodiment, however,

proximal end 404 of the fin 424 is sloped. The slope shape of the fin 424 is formed by the shape of the fin tab 405 (phantom view) inside the fin 424. The backing layer 400 gradually widens in the fin tab region 407 (not shown) with distance from the proximal end 138 (not shown) to the distal end 137 (not shown) of the backing layer 130 (not shown) until the appendage height is reached. The proximal end 404 of the fin 424 is straight and forms an acute angle with the first side 133 of the base portion 158 of the backing layer 130 (not shown). In an alternate embodiment, the proximal end 404 of the fin 424 forms a 45 degree angle with the first side 133 of the base portion 158 of the backing layer 130 (not shown). In another embodiment, the proximal end 404 of the fin 424 is curved slope.

In alternate embodiments, the distal end 403 of the fin 424 is straight and shaped so that it forms an acute angle with the first side 133 of the base portion 158 of the backing layer 130 (not shown). In alternate embodiments, the distal end 403 of the fin 424 is curved.

FIGS. 21(a)-21(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS.

15(a)-15(b). The integrated fin 120 is absent, however, from the backing layer 130.

The lead electrode assembly 100 of this embodiment further comprises a cylindrical rod 500 having a loop 515 formed therein. The loop 515 comprises the appendage 118 of this embodiment. The loop 515 is a member attached to the electrode 107 that can be gripped and used to precisely locate the electrode 107 during its surgical implantation within the patient.

FIG. 21(a) illustrates a side plan view of the embodiment. The cylindrical rod 500 comprises a first straight portion 510, a second straight portion 512 and a portion formed into a loop 515. The first straight portion 510 is separated from the second straight portion 512 by the loop 515.

The rod 500 is made of platinum iridium. In an alternative embodiment, the rod 500 is made of titanium or platinum.

The first straight portion 510 and second straight portion 512 are spot welded to the top surface 110 of the electrode 107. The loop 515 in the rod 500 extends away from the top surface 110 of the electrode 107.

The backing layer 130 is similar to the backing layer 130 illustrated in FIGS. 15(a)-15(b). The backing layer 130 is disposed over the electrode 107. The first straight portion 510 and second straight portion 512 of the rod 500 are positioned between the second surface 132 of the backing layer 130 and the top surface 110 of the electrode 107.

FIG. 21(b) illustrates a cross-sectional rear plan view of the embodiment of the lead electrode assembly shown in FIG. 21(a). The first straight portion 510 and second straight portion 512 are positioned such that they are parallel to the first pair of sides 108 of the electrode 107. The first straight portion 510 and second straight portion 512 are both centered between the first pair of sides 108 of the electrode 107. In an alternative embodiment, the first straight portion 510 and second straight portion 512 are not parallel to and centered between the first pair of sides 108 of the electrode 107.

FIG. 21(c) illustrates a top plan view of the embodiment of the lead electrode assembly shown in FIG. 21(a). An aperture 517 is formed in the backing layer 130. The aperture 517 in the backing layer is positioned such that the loop 515 extends

through and beyond the aperture 517 in a direction away from the top surface 110 of the electrode 107. The backing layer 130 is attached to the electrode 107 with stitching 139.

5 FIGS. 22(a)-22(d) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 15(a)-15(b). This embodiment comprises a backing layer 610, however, that lacks the integrated fin 120 illustrated in FIGS. 15(a)-15(b).

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995

FIG. 22(a) illustrates a top plan view of the backing layer 610 of this embodiment prior to its attachment to the rest of the lead electrode assembly 100. The backing layer 610 is cut in a pattern as shown. The backing layer comprises a first surface 131, a second surface 132 (not shown), a distal end 137, a proximal end 138, a first side 133, a second side 134 and an indented fin-forming region 620. The indented fin-forming region 620 comprises a first edge 690 and a second edge 691.

20 The backing layer 610 is formed so that the first side 133 and the second side 134 are substantially parallel and of substantially the same size as the first pair of sides 108 of the electrode 107. The proximal end 138 is formed so that it is

substantially perpendicular to the first side 133 and the second side 134 of the backing layer 610. The proximal end 138 is longer than the second pair of sides 109 of the electrode 107 by a length A. The backing layer 610 has a varying width C measured from its distal end 137 to its proximal end 138 along a line parallel to its first side 133.

The backing layer is divided into three sections. A first backing section 693, a second backing section 692 and an indented fin-forming region 620 of length A. The length of the fin-forming region 620, A, is approximately 10 mm. In other embodiments, the length of the fin-forming region 620, A, ranges between approximately 2 mm and approximately 20 mm.

The area within the indented fin-forming region 620 is equally divided into a first fin area 612 and a second fin area 615. The dividing line 617 between the first fin area 612 and the second fin area 615 is substantially parallel to the first side 133.

The width, C, of the backing layer 610 is equal to the distance between the second pair of sides 109 of the electrode 107 except in the indented fin-forming region 620. In the indented fin-forming region 620, the width, C, of the backing

layer 610 is B. The width, B, of the backing layer 610 in the fin-forming region 620, is approximately 1 cm. In alternate embodiments, the width, B, of the backing layer 610 in the fin-forming region 620 ranges between approximately 2 mm and approximately 6 cm. In other embodiments, however, the fin-forming region 620 ranges between 2 mm and the width, C, of the backing layer 610. In other embodiments, the fin-forming region 620 is longer than the width, C, of the backing layer 610.

The variation in width between the areas inside and outside the indented fin-forming region 620, forms the first edge 690 and a second edge 691 of the fin-forming region 620.

A first notch 136(a) is formed on the distal end 137 the first edge 690 of the fin-forming region 620 of the backing layer 130. A second notch 136(b) is formed on the distal end 137 the second edge 691 of the fin-forming region 620 of the backing layer 130.

The backing layer 610 in this embodiment is formed of flexible silicone. In alternative embodiments the backing layer 610 is formed of any bio-compatible, flexible polymeric material.

FIG. 22(b) illustrates a top plan view of the lead electrode assembly 100 of this embodiment. The backing layer 610 is attached to the electrode 107, so that the first edge 690 and a second edge 691 of the fin-forming region 620 of the backing layer 610 meet. This causes the backing layer 610 in the first fin area 612 and the second fin area 615 to fold together to form a fin 120.

The first notch 136(a) and second notch 136(b) formed on the distal end 137 the first edge 690 and second edge 691 of the fin-forming region 620 of the backing layer 130 meet to form a notch 136 on the distal end 137 of the backing layer, through which the lead fastener 146 rises. Stitching 660 holds the backing layer to the electrode 107.

FIG. 22(c) illustrates a side plan view of the lead electrode assembly 100 of this embodiment. Stitching 660 holds the first fin area 612 and a second fin area 615 of the backing layer 610 together to form the fin 120.

FIG. 22(d) illustrates a front plan view of the lead electrode assembly 100 of this embodiment. In one embodiment, the fin 120 is reinforced with a layer of Dacron® polymer mesh positioned between the first fin area 612 and a second fin area

615. In another embodiment, the Dacron® polymer mesh is attached only to either first fin area 612 or the second fin area 615. In other embodiments, the fin 120 is similarly reinforced with a layer of any polymeric material.

5

FIGS. 22(e) and 22(f) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 22(a)-22(d). The backing layer 610 is substantially similar to the backing layer 610 illustrated in FIG. 22(a). The backing layer 610 in this embodiment, however, is cut along line 617. The fin 120 of this embodiment comprises a proximal edge 129. The proximal edge 129 of the fin 120 is slope-shaped. The sloped shape can reduce the resistance offered by the tissue of the patient as it slides against the fin 120 during the insertion of the lead electrode assembly 100 into the patient.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

FIGS. 23(a) and 23(b) illustrate a property of the embodiment of the lead electrode assembly 100 illustrated in FIGS. 22(e) and 22(f). The backing layer 610 is flexible, such that the substantially planar fin 120 formed therefrom is flexible and able to fold. Because the ability of the fin 120 to fold effectively reduces its appendage height, it may make the fin more comfortable to the patient after it is implanted.

FIG. 23(a) shows fin 120 in an upright condition. When pressure is applied perpendicular to the first surface 131 of backing layer in the first fin area 612, along line 677 for example, the fin 120 folds as shown in FIG. 23(b). When the fin 120 folds, its appendage height, $H_{\text{Appendage}}$, is reduced. This can be seen by a comparison between FIG. 23(a) and FIG. 23(b).

The backing layer 610 in this embodiment is formed of a polymeric material. In an alternative embodiment, the backing layer 610 is formed of any bio-compatible, flexible polymeric material.

FIGS. 24(a)-24(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 22(a)-22(d).

As shown in FIG. 24(a), however, the material from the first fin area 612 and the second fin area 615 of the backing layer 610 is not fastened together with stitching 660 in this embodiment. The resulting appendage 118 is formed in the shape of a tube.

In alternate embodiments, the backing layer 610 is coupled to the electrode 107 such that the material from the first fin area 612 and the second fin area 615 of the backing layer 610 does not touch except at the dividing line 617 between the first
5 fin area 612 and the second fin area 615. The separation between the first fin area 612 and the second fin area 615 of the backing layer 610 can allow the appendage 118 of this embodiment to be highly flexible. This flexibility can reduce the resistance offered by the tissue of the patient as it slides
10 against the appendage 118 during the insertion of the lead electrode assembly 100 into the patient.

FIG. 24(b) illustrates a side plan view of the embodiment illustrated in FIG. 24(a). The appendage 118 of this embodiment comprises a proximal edge 129. The proximal edge 129 of the
15 appendage 118 is slope-shaped. The sloped shape can reduce the resistance offered by the tissue of the patient as it slides against the appendage 118 during the insertion of the lead electrode assembly 100 into the patient.

In alternate embodiments, the proximal edge 129 of the tube formed by the appendage 118 is closed. In one embodiment, the proximal edge 129 of the appendage 118 is closed by a cap (not shown). In another embodiment, the proximal edge 129 of the

appendage 118 is closed with stitching placed between the first fin area 612 and the second fin area 615 only at the proximal edge 129 of the appendage 118. In another embodiment, the proximal edge 129 of the appendage 118 is closed by any other means known in the art for this purpose.

FIG. 24(b) illustrates a top plan view of the embodiment illustrated in FIGS. 24(a)-24(b).

FIGS. 25(a)-25(d) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 15(a)-15(b). The backing layer 130 of this embodiment, however, lacks an integrated fin 120.

FIG. 25(a) illustrates a front plan view of the lead electrode assembly. The fin 120 in this embodiment comprises a fin head 700 and flexible joining material 702.

The fin head 700 comprises a rectangular sheet having a first face 705, a second face 706, a first end 710 and a second end 712. The fin head 700 further comprises a height measured along the first face 705 between the first end 710 and the

second end 712 and a length measured perpendicular to its height.

The fin head 700 is made of rigid silicone, which has a 5 high durometer. In alternate embodiments, the fin head 700 is composed of any rigid bio-compatible material, such as a rigid bio-compatible polymeric material.

10 The flexible joining material 702 comprises a rectangular
15 sheet having a first face 720, a second face 721, a first end
718 and a second end 719. The flexible joining material 702
further comprises a height measured along the first face between
the first end 718 and the second end 719. The flexible joining
material 702 also comprises a length measured perpendicular to
15 its height. The length of the flexible joining material 702 is
the same as the length of fin head 700.

The second end 712 of the second face 706 of the fin head
700 is attached to the first end 718 of the first face 720 of
20 the flexible joining material 702. The fin head 700 is attached
to the flexible joining material 702 with stitching 725. The
second end 719 of the first face 720 of the flexible joining
material 702 is attached to the first surface 131 of the backing

material 130. The flexible joining material 702 is attached to the backing material 130 with stitching 730.

The flexible joining material 702 is made of flexible silicone. It will be recognized by one skilled in the art, however, that the flexible joining material 702 may be made from many other flexible materials, such as a flexible polymeric material.

FIG. 25(b) illustrates a property of the fin 120. When pressure is applied perpendicular to the first surface 705 of the fin head 205, the fin 120 folds as shown. When the fin 120 folds, its appendage height, $H_{\text{Appendage}}$, is reduced. This can be seen by a comparison between FIG. 25(a), which shows the fin 120 in an upright position and FIG. 25(b) which shows the fin 120 in a folded position.

FIG. 25(c) illustrates a top planar view of the lead electrode assembly 100 of the embodiment illustrated in FIGS. 25(a) and 25(b). Neither the corners of the electrode 107 nor the corners 735 of the backing layer 130 of this embodiment are rounded. In an alternate embodiment, both the corners of the electrode 107 and the corners 735 of the backing layer 130 of this embodiment are rounded.

FIG. 26 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 25(a)-25(d). The backing layer 130 of this embodiment, however, lacks a fin head 700 and flexible joining material 702.

Moreover, the appendage 118 in this embodiment comprises a tube 740 having an interior 755, an exterior 756, a proximal end 757 and a distal end 758. The tube comprises a sheet of material 750. The sheet of material 750 is substantially rectangular having a first pair of sides 751, a second pair of sides 752, a first surface 753 and a second surface 754.

The sheet of material 750 is folded so that its first pair of sides 751 abut each other. The folded sheet of material 750 forms a tube 740. The first surface 753 of the sheet of material 750 faces the interior 755 of the tube 740. The second surface 754 of the sheet of material 750 faces the exterior of the tube 756. In folding the sheet of material 750 so that the first pair of sides 751 abut each other, the second pair of sides 752 of the sheet of material 750 are folded in a circular shape to form the proximal end 757 and distal end 758 of the tube 740. This results in the tube 740 having a cylindrical

shape. The diameter of the circular proximal end 757 and distal end 758 of the tube 756 is approximately 5 mm. In alternate embodiments, the diameter range between approximately 1 mm and approximately 10 mm. The length of the tube 756 as measured 5 between the proximal end 757 and distal end 758 of the tube 756 is approximately 1 cm. In alternate embodiments, length of the tube 756 ranges between approximately 2 mm and approximately 6 cm. In one embodiment, the tube 756 is substantially as long as the electrode 107.

10
The second surface 754 of the sheet of material 750 is attached to the first surface 131 of the backing layer 130. The first pair of sides 751 of the sheet of material 750 are attached to the backing layer 130 with stitching 760.

1
In alternate embodiments, the proximal end 757 of the tube 740 is closed. In one embodiment, the proximal end 757 of the tube 740 is closed by a cap (not shown). In another embodiment, the proximal end 757 of the tube 740 is closed by holding one of 20 the second pair of sides 752 of the sheet of material 750 closed with stitching. In another embodiment, the proximal end 757 of the tube 740 is closed by any other means known in the art for this purpose.

It should be noted that the appendage 118 in some alternative embodiments comprises a tube with a shape other than a cylinder. An example of a tube with a shape other than cylindrical is illustrated below in FIG. 27.

5

FIG. 27 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIG. 26. The tube 740 comprising a sheet of material 750, however, is absent from this embodiment.

Moreover, the appendage 118 of this embodiment comprises a tube 770 having an interior 755 an exterior 756, a proximal end 757 and a distal end 758. The tube comprises a first sheet of material 775, a second sheet of material 776 and a third sheet of material 777. The first sheet of material 775, the second sheet of material 776 and the third sheet of material 777 are all substantially rectangular in shape. Each comprises a first pair of sides 784, a second pair of sides 786, a first surface 788 and a second surface 789. The first pair of sides 784 of each sheet of material are parallel to each other. In another embodiment, the first pair of sides 784 of each sheet of material are non-parallel. The second pair of sides 786 of each sheet of material are parallel to each other. In another

embodiment, the second pair of sides 786 of each sheet of material are non-parallel.

The first pairs of sides 784 of each sheet of material are
5 attached to the first pair of sides 784 of the other sheets of material. In this way the second pair of sides 786 of the first sheet of material 775, the second sheet of material 776 and the third sheet of material 777 form a triangular shaped proximal end 757 and distal end 758 of the tube 770. The sheets of
10 material are attached to each other such that the second surface 789 of each sheet of material faces the interior 755 of the tube 770. The sheets of material are attached to each other with stitching 791.

1 The height of the tube 770 is approximately 5 mm. In alternate embodiments, the height ranges between approximately 1 mm and approximately 10 mm. The length of the tube 770 as measured between the proximal end 757 and distal end 758 of the tube 770 is approximately 1 cm. In alternate embodiments,
20 length of the tube 770 ranges between approximately 2 mm and approximately 6 cm. In one embodiment, the tube 770 is substantially as long as the electrode 107.

The second sheet of material 776 is attached to the backing layer 130 with stitching 790. The first surface 788 of the second sheet of material 776 is positioned next to the first surface 131 of the backing layer 130.

5

In alternate embodiments, some or all of the sheets of material are reinforced with a layer of Dacron® polymer mesh. In one embodiment, the Dacron® polymer mesh is attached to the first surface 788 of each sheet of material. In another embodiment, the Dacron® polymer mesh is attached to the second surface 789 of each sheet of material. In another embodiment, the sheets of material are similarly reinforced with a layer of any polymeric material.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2

FIGS. 28(a)-28(d) illustrate various possible positions for the appendage 118 relative to the lead 21 of the lead electrode assembly 100. Additionally, up to this point, all embodiments of the electrode 107 illustrated and discussed have had a rectangular shape. These figures illustrate alternative embodiments with electrodes 107 of different shapes.

At this point, it is useful to set out two definitions in order to discuss the possible orientation of appendages 118.

The interface line is defined as the center line of the appendage 118 as traced on the electrode 107. FIG. 28(a) illustrates the interface line 800 of the appendage 118 of a lead electrode assembly 100.

The line of the lead is defined as the line along which the lead 21 of the lead electrode assembly 100 enters the lead fastener 146. The line of the lead 805 of line 21 is shown as it enters the lead fastener 146 (in phantom). As the lead 21 approaches the lead fastener 146, the closest section 807 of the lead 21 forms the line of the lead. When the lead 21 is not bent, the entire lead 21 lies along the line of the lead.

FIG. 28(b) illustrates an embodiment wherein the lead 21 is not bent and the entire lead 21 lies along the line of the lead 805.

5 The electrode length, $L_{\text{Electrode}}$, is the length of the electrode 107 as measured along the interface line 800.

10 In the embodiments of the lead electrode assembly 100 shown in FIGS. 28(b) and 28(c), the interface line 800 is the same line as the line of the lead 805. In the embodiment shown in FIG. 28(a) the interface line 800 is parallel with the line of the lead 805.

15 In the embodiment of the lead electrode assembly 100 shown in FIG. 28(d), the interface line 800 intersects the lead fastener 146 (phantom view).

20 FIGS. 28(e)-28(h) show various additional electrode shapes disposed in various lead electrode assemblies 100. The electrode shapes are not limited, however, to the shapes specifically illustrated.

The electrode 204 depicted in FIG. 28(e) has a "thumbnail" shape. The proximal end 104 of this electrode 107 is generally

rounded. As the electrode 107 moves distally along its length, the conductive surface terminates at the distal end 103 of the electrode 107.

5 An ellipsoidal shaped electrode 107 is depicted in FIG. 28(f). The proximal end 104 of the ellipsoidal shaped electrode 107 is generally rounded. As the ellipsoidal shaped electrode 107 moves distally along its length, the conductive surface terminates in a rounded distal end 103.

10 A circular shaped electrode 107 is illustrated in FIG. 28(g).

15 A triangular shaped electrode 107 is depicted in FIG. 28(h). Triangular shaped electrodes 107 also incorporate electrodes that are substantially triangular in shape. In particular to FIG. 28(h), the corners of the triangular shaped electrode 107 are rounded.

20 Several lead electrode assembly manipulation tools 927 have been developed to manipulate the lead electrode assemblies during their surgical implantation.

5 during their implantation in patients.

10

1

20 In one embodiment, the curvature of the hemostat approximates the curvature of the thorax of a patient along a subcutaneous path taken from the anterior axillary line, posteriorly toward the spine.

The first prong 931 is pivotally attached to the second prong 932 by the hinge 939. The hinge is attached to the first prong 931 approximately 10 cm from the first end 933. In this embodiment, the hinge is attached to the second prong 932 approximately 10 cm from the second end 935.

The eyelet pin 940 can be inserted through the eyelet 301 of a fin 120 of the lead electrode assembly 100 such as the lead electrode assembly 100 discussed with reference to FIG. 17(a)-17(g) as a means of capturing the lead electrode assembly 100 prior to its implantation in a patient.

The eyelet pin 940 is a cylindrical member having a first end 941 and a second end 942. In an alternate embodiment, the eyelet pin 940 is a hook-shaped member. The diameter of the cylinder is approximately 2 mm. In alternate embodiments, the diameter of the cylinder ranges from approximately 1 mm to approximately 5 mm. The length of the eyelet pin 940 is approximately 8 mm. In alternate embodiments, the length of the eyelet pin 940 ranges from approximately 4 to approximately 15 mm.

The first end of the eyelet pin 940 is attached to the second prong 932, approximately 8 mm from the second end 936 of

the second prong 932. In alternate embodiments, the eyelet pin 940 is attached to the second prong 932 at various lengths from the second end 936 of the second prong 932.

5 The eyelet pin 940 is attached to the second prong 932 in an orientation perpendicular to the length of the second prong 932. The eyelet pin 940 is attached to the second prong 932 so that it extends away from the second end 934 of the first prong 931.

10 In this embodiment, all of the components are made of stainless steel. In an alternative embodiment, some or all of the components are composed metals other than stainless steel or are composed of a polymeric material.

15 We now turn to a discussion of the positions of the components that comprise an entire S-ICD system including the lead electrode assembly 100 when it is implanted in a patient.

20 FIGS. 30(a) and 30(b) illustrate an embodiment of the S-ICD system implanted in a patient as a means of providing cardioversion/defibrillation energy.

FIG. 30(a) is a perspective view of a patient's ribcage with an implanted S-ICD system. The S-ICD canister 11 is implanted subcutaneously in the anterior thorax outside the ribcage 1031 of the patient, left of the sternum 920 in the area over the fifth rib 1038 and sixth rib 1036. The S-ICD canister 11, however, may alternately be implanted anywhere over the area between the third rib and the twelfth rib. The lead 21 of the lead electrode assembly 100 is physically connected to the S-ICD canister 11 where the transthoracic cardiac pacing energy or effective cardioversion/defibrillation shock energy (effective energy) is generated. The term "effective energy" as used in this specification can encompass various terms such as field strength, current density and voltage gradient.

The lead 21 of the lead electrode assembly 100 travels from the S-ICD canister 11 to the electrode 107, which is implanted subcutaneously in the posterior thorax outside the ribcage 1031 of the patient in the area over the eighth rib 1030 and ninth rib 1034. The electrode 107, may alternately be implanted subcutaneously anywhere in the posterior thorax outside the ribcage 1031 of the patient in the area over the third rib 1030 and the twelfth rib 1034. The bottom surface 115 of the electrode 107 faces the ribcage. The electrode or active

surface 15 (phantom view) of the canister 11 also faces the ribcage.

FIG. 30(b) is a cross-sectional side plan view of the patient's rib cage. Here it is seen that the lead 21 travels around the circumference of the thorax, in the subcutaneous layer beneath the fat 1050 between the outside of the ribcage 1031 and the skin 1055 covering the thorax.

We now turn to a discussion of a method by which the lead electrode assembly 100 of the S-ICD system is implanted in a patient using a standard hemostat as well as the enhanced hemostat described above. FIG. 31 and FIGS. 32(a)-32(d) illustrate aspects of this method.

In operation, as seen in FIG. 31, an incision 905 is made in the patient 900 in the anterior thorax between the patient's third and fifth rib, left of the sternum 920. The incision can alternately be made in any location between the patient's third and twelfth rib. The incision can be made vertically (as shown), horizontally or angulated. In order to minimize scarring, the incision can be made along Langer's lines.

FIG. 32(a) shows a bottom view cross-section of the patient 900, along the line 32(a) shown in FIG. 31. A hemostat 930, with prongs 932 is introduced into the incision 905. The hemostat 930 is inserted with its prongs together without anything gripped between them. The prongs 932 of the hemostat 930 are pushed through the fat 1050 between the skin 1055 of the thorax and the ribcage 1031 to create a subcutaneous path 1090. The prongs 932 of the hemostat 930 can alternately be pushed beneath the fat 1050 that lies between the skin 1055 of the thorax and the ribcage 1031 to create a subcutaneous path 1090 between the fat 1050 and the ribcage 1031.

The hemostat is moved around the ribcage 1031 until the subcutaneous path 1090 reaches within approximately 10 cm of the spine 1035 between the eighth rib 1030 and ninth rib 1034 (this location is best seen in FIG. 30(a)) between the skin 1055 and the ribcage 1031. The subcutaneous path 1090 can alternately be made to reach any location between the skin 1055 and the ribcage 1031 between the patient's third and twelfth rib. The hemostat 930 is then withdrawn. Alternately, the hemostat 930 can be moved around the ribcage 1031 until the subcutaneous path 1090 terminates at a termination point 1085 at which a line 1084 drawn from the termination point 1085 to the incision 905 would intersect the heart 910.

Next, as shown in FIG. 32(b), the appendage 118 of a lead electrode assembly 100, is squeezed between the tongs 932 of a hemostat 930.

5

As shown in FIG. 32(c), the lead electrode assembly 100 and hemostat tongs 932 are introduced to the subcutaneous path 1090 and pushed through the subcutaneous path until the lead electrode assembly 100 reaches the termination point 1085 of the path. The appendage 118 of the lead electrode assembly 100 is then released from the tongs 932 of the hemostat 930. The hemostat 930 is then withdrawn from the subcutaneous path 1090.

In an alternative method, the enhanced hemostat 930 seen in FIG. 29 is used to introduce the lead electrode assembly 100 into the subcutaneous path 1090 created as discussed above. After the subcutaneous path 1090 is created, the lead electrode assembly 100 is attached to the enhanced hemostat 930 as shown in FIG. 32(d). Eyelet pin 1108 is inserted through the eyelet 301 in the fin 120 of the lead electrode assembly 100. The enhanced hemostat 930 is then used to introduce the lead electrode assembly 100 into the subcutaneous path 1090, as shown in FIG. 32(c). The lead electrode assembly 100 is then moved through the subcutaneous path 1090 until the electrode 107

reaches the end of the path 1085. The enhanced hemostat 930 is then moved until the lead electrode assembly 100 is released from the eyelet pin 940. The enhanced hemostat 930 is then withdrawn from the subcutaneous path 1090.

5

FIGS. 33(a)-33(c) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). The backing layer 130 of this embodiment, however, lacks an integrated fin tab 180. Moreover, the appendage 118 of the lead electrode assembly 100 of this embodiment comprises a rail 1100.

FIG. 33(a) illustrates the rail 1100 of the lead electrode assembly 100 of this embodiment. The rail 1100 is a member attached to the electrode 107 that can be captured by a lead electrode assembly manipulation tool and used to precisely locate the electrode 107 during its surgical implantation within the patient. The rail 1100 comprises three sections: a foundation 1105, a riser 1110 and a head 1115. The foundation 1105 is separated from the head 1115 by the riser 1125.

The foundation 1105 comprises a flat, substantially planar member, comprising a first pair of sides 1106 and a second pair

of sides 1107. The first pair of sides 1106 of the foundation 1105 are substantially linear and substantially parallel. In an alternate embodiment, the first pair of sides 1106 of the foundation 1105 are neither linear nor parallel. The length of the first pair of sides 1106 of the foundation 1105 is approximately 2 cm. In alternate embodiments, the length of the first pair of sides 1106 of the foundation 1105 ranges from approximately 2 mm to approximately 6 cm. In an alternate embodiment, the first pair of sides 1106 of the foundation 1105 are as long as the electrode 107 (not shown) of the lead electrode assembly 100 (not shown).

The second pair of sides 1107 of the foundation 1105 are substantially linear and substantially parallel. In an alternate embodiment, the second pair of sides 1107 of the foundation 1105 are neither linear nor parallel. The length of the second pair of sides 1107 of the foundation 1105 is approximately 1 cm. In alternate embodiments, the length of the second pair of sides 1107 of the foundation 1105 ranges from approximately 0.5 cm to approximately 3 cm.

The foundation 1105 further comprises a top surface 1120 and a bottom surface 1121. The foundation 1105 has a thickness, measured as the distance between the top surface 1120 and the

bottom surface 1121. The thickness of the foundation 1105 is 2 mm. In alternate embodiments, the thickness of the foundation 1105 ranges between approximately 1 mm and approximately 5 mm. -

5 Turning now to the riser 1110, the riser 1110 comprises a flat, substantially planar protrusion from the top surface 1120 of the foundation 1105 of the rail 1100. The riser comprises a first face 1125, a second face 1126, a top 1127, a bottom 1128, a proximal end 1123 and a distal end 1124. The first face 1125 and second face 1126 are parallel to each other and perpendicular to the top surface 1120 of the foundation 1105. The first face 1125 and a second face 1126 of the riser 1110 are parallel to the first pair of sides 1106 of the foundation 1105. The bottom 1128 of the riser 1110 joins the foundation 1105 in a position centered between the first pair of sides 1106 of the foundation 1105. The proximal end 1123 of the riser 1110 and the distal end 1124 of the riser 1110 are parallel to each other and perpendicular to the top surface 1120 of the foundation 1105. In other embodiments, the proximal end 1123 of the riser 1110 and the distal end 1124 of the riser 1110 are not parallel to each other.

In one embodiment, the proximal end 1123 of the riser 1110 is not perpendicular the top surface 1120 of the foundation

1105. Instead, the proximal end 1123 of the riser 1110 is sloped, so that the proximal end 1123 and the distal end 1124 of the riser 1110 are closer at the top 1127 of the riser 1110 than at the bottom 1128 of the riser. A slanted proximal end 1123
5 make the rail 1100 of the lead electrode assembly 100 offer less resistance against the tissues of the patient during insertion into the patient.

10 The height of the riser, H_{riser} , is measured as the distance between the top surface 1120 of the foundation 1105 to the head 1115, perpendicular to the top surface 1120 of the foundation 1105. The height of the riser is approximately 5 mm. In alternate embodiments, the height of the riser ranges from approximately 1 mm to approximately 10 mm.

15 The riser 1110 has a width, measured as the distance between the first face 1125 and the second face 1126. The width of the riser 1110 is 2 mm. In alternate embodiments, the width of the riser 1110 ranges from approximately 1 mm to
20 approximately 6 mm.

Turning now to the head 1115, the head 1115 is a flat, substantially planar member. The head 1115 comprises a first pair of sides 1136, a second pair of sides 1137, a top surface

1116 and a bottom surface 1117 (not shown). The first pair of sides 1136 and the second pair of sides 1137 of the head 1115 are substantially linear and substantially parallel. In an alternate embodiment, the first pair of sides 1136 of the head 5 1115 are neither linear nor parallel. In an alternate embodiment, the second pair of sides 1137 of the head 1115 are neither linear nor parallel.

10 The length of the first pair of sides 1136 of the head 1115 is equal to the length of the first pair of sides 1106 of the foundation 1105. In alternate embodiments, the length of the first pair of sides 1136 of the head 1115 is unequal to the length of the first pair of sides 1106 of the foundation 1105. The length of the second pair of sides 1137 of the head 1115 is approximately 5 mm. In alternate embodiments, the length of the second pair of sides 1137 of the head 1115 ranges from approximately 3 mm to approximately 10 mm.

20 The bottom surface 1117 of the head 1115 joins the top 1127 of the riser 1110 opposite the foundation 1105 of the rail 1100. The top surface 1116 and the bottom surface 1117 of the head 1115 are parallel to the top surface 1120 of the foundation 1105. In an alternate embodiment, the top surface 1116 and the

bottom surface 1117 of the head 1115 are not parallel to the top surface 1120 of the foundation 1105.

5 The head 1115 has a thickness, measured as the distance between the top surface 1116 and the bottom surface 1117 of the head 1115. The thickness of the head 1115 is approximately 2 mm. In alternate embodiments, the thickness of the head ranges between approximately 2 mm and approximately 10 mm.

10 The foundation 1105, the head 1115 and the riser 1110 are made of stainless steel. In alternate embodiments, some or all of the sections of the rail 1100 are made of metals other than stainless steel. In alternate embodiments, some or all of the sections of the rail 1100 are made of a polymeric material wherein the polymeric material is selected from the group consisting essentially of a polyurethane, a polyamide, a polyetheretherketone (PEEK), a polyether block amide (PEBA), a polytetrafluoroethylene (PTFE), a silicone and mixtures thereof.

20 The foundation 1105, the head 1115 and the riser 1110 are machined from the same piece of material. In an alternate embodiment, some or all of the sections are formed independently and welded to the others.

Turning in detail to FIG. 33(b), the position of the rail 1100 within the lead electrode assembly 100 will be discussed. The rail 1100 is positioned so that its bottom surface 1121 is adjacent to and covers a region of the first surface 131 of the backing layer 130. The rail is centered between the first side 133 and second side 134 of the backing layer 130. In an alternate embodiment, the rail is not centered between the first side 133 and second side 134 of the backing layer 130.

In an alternate embodiment, there is no backing layer 130 and the rail 1100 is positioned so that its bottom surface 1121 is adjacent to the top surface 110 of the electrode 107.

Turning now to the electrode 107 of this embodiment, the electrode 107 is the same shape and size as the electrode 107 discussed with reference to FIGS. 17(a)-(g). In alternative embodiments, the length of the first pair of sides 108 (not shown) and second pair of sides 109 (not shown) of the electrode 107 range independently between approximately 1 cm and approximately 5 cm.

Turning now to the molded cover 220, the skirt 222 of the molded cover 220 partially covers the bottom surface 115 of the electrode 107 as discussed with reference to FIG. 17(d). The

molded cover 220 further substantially covers the first surface 131 of the backing layer 130. The molded cover 220 does not cover the first surface 131 of the backing layer 220 in the region in which the bottom surface 1121 of the rail 1100 is adjacent to the backing layer 130. Instead, the molded cover 220 in this region substantially covers the top surface 1120 of the rail 1100. The molded cover 220 abuts the first face 1125 and second face 1126 of the riser 1110 of the rail 1100.

Turning to FIG. 33(c), the position of the lead 21 and the appendage 118 will now be discussed. The interface line 800 of the appendage 118 and the line of the lead 805 are the same line. In an alternate embodiment, interface line 800 of the appendage 118 and the line of the lead 805 are not the same line. The line of the lead 805 is centered between the first pair of sides 108 (phantom view) of the electrode 107 (phantom view). In an alternate embodiment, the line of the lead 805 is not centered between the first pair of sides 108 of the electrode 107.

FIG. 34 illustrates an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 33(a)-33(c). In this embodiment, however, the dimensions of the electrode 107

are different from those of the embodiment illustrated in FIGS.
33(a)-33(c).

The first pair of sides 108 of the electrode 107 (phantom
5 view) are approximately 2.4 cm in length. The second pair of
sides 109 of the electrode 107 are approximately 4 cm in length.
In alternative embodiments, the length of the first pair of
sides 108 and second pair of sides 109 of the electrode 107
range independently between approximately 1 cm and approximately
10 5 cm.

The interface line 800 of the rail 1100 is parallel to the
line of the lead 805. In an alternate embodiment, the interface
line 800 of the rail 1110 is not parallel to the line of the
15 lead 805. The interface line 800 of the rail 1100 is centered
between the first pair of sides 108 of the electrode 107. In an
alternate embodiment, the interface line 800 of the rail 1100 is
not centered between the first pair of sides 108 of the
electrode 107.

20

The line of the lead 805 is not centered between the first
pair of sides 108 of the electrode 107. Because the lead 805 is
not centered between the first pair of sides 108 of the
electrode 107, the lead rail 1110 may be more easily accessed by

a lead electrode manipulation tool (not shown). In an alternate embodiment, the line of the lead 805 is centered between the first pair of sides 108 of the electrode 107.

5 FIG. 35 illustrates a lead electrode assembly manipulation tool 927 useful for manipulating a lead electrode assembly (not shown) having an appendage 118 comprising a rail 1100 during the implantation of the lead electrode assembly 100 in a patient. Examples of such lead electrode assembly 100 embodiments are shown in FIGS. 33(a)-33(c) and 34.

10 The lead electrode assembly manipulation tool 927 comprises a handle 1142, a rod 1144 and a rail fork 1146. The handle 1142 is connected to the rod 1144. The rail fork 1146 is also connected to the rod 1144.

15 The rod 1144 is a cylindrical member with a diameter of approximately 4 mm, approximately 25 cm in length, having a proximal end 1147 and a distal end 1148. The rod 1144 is curved with a radius of approximately 20 cm.

20 The rod is made of steel. In other embodiments, the rod is composed of titanium, a polymeric material or any other material suitable for this purpose.

The handle 1142 is a cylindrical member with a diameter sized to fit comfortably in the palm of a surgeon's hand. The rod is connected to the proximal end 1147 of the rod 1144. In an alternate embodiment, the handle 1142 is not cylindrical. In an alternate embodiment, the handle 1142 has ergonomic contours.

The handle is made of polyurethane. In an alternate embodiment, the handle is made of any metal, or any polymeric material suitable for this purpose.

Turning now to FIG. 35(b), the rail fork 1146 is attached to the distal end 1148 of the rod 1144. The rod further comprises a slot 1162 in its distal end. The rail fork comprises a pair of tines 1151 separated by a gap 1153 and a tine base 1160 having a tang 1161.

Each of the pair of tines 1151 has a proximal end 1154 and a distal end 1155. The proximal ends 1154 of the pair of tines 1151 are attached to the tine base 1160. Each of the pair of tines 1151 has a substantially rectangular form with straight inner sides 1156 and straight outer sides 1157. The distal ends 1155 of each of the pair of tines 1151 are rounded. The length

of the pair of tines 1151, measured from the distal end 1155 to the proximal end 1154, is substantially equal to the length of the first pair of sides 1106 of the rail 1100 of the lead electrode assembly 100. In alternate embodiments, the length of the pair of tines 1151 is substantially greater than or less than the length of the first pair of sides 1106 of the rail 1100.

The pair of tines 1151 are separated by a gap 1153 formed by the inner sides 1156 of the pair of tines 1151 and the tine base 1160.

The pair of tines 1151 and the tine base 1160 comprising the rail fork 1146 are punched from a single sheet of steel having a thickness of approximately 3 mm. In other embodiments, the rail fork 1146 is composed of titanium, a polymeric material or any other material suitable for this purpose. In one embodiment, the handle 1142, the rod 1144 and the rail fork 1146 are all made from the same piece of material.

FIG. 35(c) illustrates a side plan view of the lead electrode assembly manipulation tool 927. The rod 1144 further comprises a slot 1162 in its distal end 1148. The tine base 1160 connects the pair of tines 1151 to the distal end 1148 of

the rod 1144. The tine base 1160 comprises a tang 1161 (phantom view). The tang 1161 is inserted in the slot 1162 in the rod 1144. The tang 1161 is welded in the slot 1162 of the rod 1144.

5 We now turn to a description of the use of the lead electrode assembly manipulation tool 927 in the implantation of a lead electrode assembly 100 into a patient.

As discussed with reference to FIG. 31, an incision 905 is made in the patient 900. As discussed with reference to FIG. 32(a), a subcutaneous path 1090 is created in the patient 900 with a hemostat 932.

As shown in FIG. 35(d), the lead electrode assembly 100 is then captured by the lead electrode assembly manipulation tool 927. The rail 1110 of the lead electrode assembly 100 is inserted into the rail fork 1146 of the lead electrode assembly manipulation tool 927. The riser 1110 (phantom view) of the rail is placed into the gap 1153 between the pair of tines 1151 of the rail fork 1146. The pair of tines 1151 fit between the bottom surface 1117 of the head 1115 of the rail 1100 and the molded cover 220. The rail 1100 is slid toward the proximal end 1155 of the pair of tines 1151 until the riser 1110 of the rail 1100 reaches the tine base 1160 of the rail fork 1146. The lead

21 of the lead electrode assembly 100 can then be pulled in toward the handle 1142 of the lead electrode assembly manipulation tool 927 until it is taught. This acts to prevent the rail 1100 of the lead electrode assembly 100 from sliding 5 toward the distal end 1151 of the pair of tines 1151 of the rail fork 1146.

As discussed with reference to FIG. 32(c), the lead electrode assembly manipulation tool 927 may then be used to place the lead electrode assembly 100 into the incision 905 of the patient 900 and used to move the electrode 107 to the termination point 1085 of the subcutaneous path 1090.

The lead electrode assembly 100 is then released from the lead electrode assembly manipulation tool 927. To achieve this, the lead 21 of the lead electrode assembly 100 is released so that the pair of tines 1151 of the rail fork 1146 of the lead electrode assembly manipulation tool 927 can slide relative to the rail 1100 of the lead electrode assembly 100. The lead 20 electrode assembly manipulation tool 927 may then be extracted from the subcutaneous path 1090, leaving the lead electrode assembly 100 behind.

FIGS. 36(a)-36(b) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiments illustrated in FIGS. 17(a)-17(g). The backing layer 130 of this embodiment, however, lacks an integrated fin tab 180. Moreover, the lead electrode assembly 100 of this embodiment further comprises a pocket 1300.

FIG. 36(a) illustrates a cross-sectional side plan view of this embodiment. The pocket 1300 comprises a layer of material 1315 and stitching 360. The pocket further comprises an interior 1305 and an opening 1310. The layer of material 1315 is attached to the molded cover 220 with the stitching 360. The molded cover 220 is, in turn, attached to the electrode 107.

The molded cover 220 comprises an outer surface 1330 and a top surface 1331. The outer surface 1330 of the molded cover 220 is the surface of the molded cover 220 that does not lie adjacent to the backing layer 131 or the electrode 107. The top surface 1331 of the molded cover 220 faces away from, and parallel to the electrode 107.

The layer of material 1315 of the pocket 1300 comprises an inner face 1316 and an outer face 1317. The layer of material 1315 is attached to the top surface 1331 of the molded cover 220

so that the inner face 1316 of the layer of material 1315 faces the top surface 1331 of the molded cover 220. The inner face 1316 of the layer of material 1315 also faces the top surface 110 of the electrode 107.

5

The layer of material 1315 is made of polyurethane. In other embodiments, the layer of material 1315 is made of any bio-compatible material suitable for this purpose. In other embodiments, the layer of material 1315 is made of any bio-compatible polymeric material.

The stitching 360 fastening the layer of material 1315 to the top surface 1331 of the molded cover 220 is comprised of nylon. In alternate embodiments, the stitching 360 comprises any polymeric material.

FIG. 36(b) illustrates a top plan view of the lead electrode assembly 100 of FIG. 36(a). The top surface 1331 of the molded cover 220 has a first side 1333, a second side 1334, a distal end 1336, a proximal end 1337, a length and a width.

The distal end 1336, proximal end 1337, first side 1333 and second side 1334 of the top surface 1331 of the molded cover 220 are positioned substantially over the distal end 137 (phantom

view), proximal end 138 (phantom view), first side 133 (not shown) and second side 134 (not shown) of the backing layer 130 (phantom view) respectively.

5 The width of the top surface 1331 of the molded cover 220 is measured as the distance between the first side 1333 and second side 1334 of the back surface. The length of the top surface 1331 of the molded cover is measured as the distance between the distal end 1336 and proximal end 1337 of the molded
10 cover 220.

032580.0023

1 The layer of material 1315 comprises a periphery 1318 and a middle portion 1319. More particularly, the layer of material 1315 comprises a distal end 1320, a proximal end 1321, a first side 1322 and a second side 1323. The periphery 1318 of the layer of material 1315 comprises the distal end 1320, the proximal end 1321, the first side 1322 and the second side 1323 of the layer of material 1315. The middle portion 1319 of the layer of material 1315 comprises the area between the distal end
20 1320, the proximal end 1321, the first side 1322 and the second side 1323 of the layer of material 1315.

The pocket 1300 formed by the layer of material 1315 further comprises a bounded region 1325 and a center 1326. The

bounded region 1325 of the pocket 1300 is attached to the back face 1317 of the molded cover 220. The center 1326 of the pocket 1300 is not attached to the back face 1317 of the molded cover 220. Stitching 360 in the bounded region 1325 is used to
5 attach the layer of material 1315 to the molded cover 220.

10
09940356-082701
18280-95504660
In the embodiment under discussion, the bounded region 1325 of the pocket 1300 comprises a portion of the periphery 1318 of the layer of material 1315. The bounded region 1325 of the pocket 1300 comprises the proximal end 1321, the first side 1322 and the second side 1323 of the layer of material 1315. In this embodiment, the bounded region 1325 of the pocket 1300 does not comprise the distal end 1320 of the layer of material 1315. The center 1326 of the pocket 1300 comprises the middle portion 1319 of the layer of material 1315. The bounded region 1325 is curved around the center 1326 of the pocket 1300 in a "U" shape. The bounded region 1325 of the pocket 1300 does not completely enclose the center 1326 of the pocket 1300.

20 In this embodiment, the bounded region 1325 of the pocket comprises a contiguous portion of the periphery 1318 of the layer of material 1315. In an alternate embodiment, the bounded region 1325 of the pocket comprises a plurality of segmented portions of the periphery 1318 of the layer of material 1315.

In an alternate embodiment the bounded region 1325 of the pocket 1300 does not comprise any portion of the periphery 1318 of the layer of material 1315. In alternate embodiments, the bounded region 1325 comprises any shape that could be traced on the layer of material 1315 that partially encloses a center 1326. In one embodiment, the bounded region 1325 of the pocket 1300 is a portion of a circle's circumference (not shown) that does not touch the periphery 1318 of the layer of material 1315. The center 1326 is the area inside the circle.

In an alternate embodiment, the pocket 1300 comprises a sheet of molded silicone. The molded silicone is fused to the molded cover 220 in the bounded region 1325.

The opening 1310 of the pocket 1300 comprises the area between the distal end 1320 of the layer of material 1315 and the top surface 1331 of the molded cover 220. The interior 1305 of the pocket 1300 comprises the area between the middle portion 1319 of the layer of material 1315 and the top surface 1331 of the molded cover 220.

The layer of material 1315 is positioned so that its first side 1322 and second side 1323 are positioned over the first

side 1333 and second side 1334 of the top surface 1331 of the
molded cover 220 respectively. The layer of material 1315 is
positioned so that its proximal end 1321 is positioned over the
proximal end 1337 of the top surface 1331 of the molded cover
5 220.

The layer of material 1315 is sized so that its length is
shorter than the length of the top surface 1331 of the molded
cover 220. In alternate embodiments, the layer of material 1315
10 is sized so that its length is equal to, or longer than the
length of the top surface 1331 of the molded cover 220.

The proximal end 1321 of the layer of material 1315 is
sized so that its width is substantially equal to the width of
15 the proximal end 1337 of the top surface 1331 of the molded
cover 220. The layer of material 1315 is sized so that its
width steadily increases toward its distal end 1320.

The first side 1318 of the distal end 1320 of the layer of
20 material 1315 is fastened to the first side 1333 of the top
surface 1331 of the molded cover 220. The second side 1323 of
the distal end 1320 of the layer of material 1315 is fastened to
the second side 1334 of the top surface 1331 of the molded cover
220.

Since the first end 1322 of the layer of material 1315 is wider than the top surface 1331 of the molded cover 220, the layer of material 1315 separates from the top surface 1331 of the molded cover 220 to form the interior 1305 of the pocket 1300.

In an alternate embodiment, the lead electrode assembly 100 lacks a molded cover 220 and the pocket 1300 is attached directly to the backing layer 130. In another alternate embodiment the lead electrode assembly 100 lacks a molded cover 220 and a backing layer 130 and the pocket 1300 is attached directly to the electrode 107. In a further alternate embodiment, the pocket 1300 is molded as part of the molded cover 220.

FIG. 36(c) illustrates a cross-sectional side plan view of an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 36(a)-36(b). The backing layer 130 of this embodiment, however, further comprises a fin 120 positioned in the interior 1305 of the pocket 1300. The fin 120 of this embodiment is substantially similar to the fin 120 of the embodiment illustrated in FIG. 17(b).

The fin 120 comprises an integrated fin tab 180 formed on the backing layer 130. The molded cover 220 covers the integrated fin tab 180 to form the fin 120. The integrated fin tab 180 has a slope-shaped proximal edge 183. The sloped-shape of the resulting fin 120 permits a the fin 120 to fit deeply into the interior 1305 of the pocket 1300. The hood can act to reduce the resistance presented by the tissues of the patient against the fin 120 and any tool used to grasp the fin 120 during insertion of the lead electrode assembly 100. Such a hood can be placed over any fin discussed in the specification to perform this function or any other function.

In alternate embodiments, appendages other than a fin are positioned between the pocket 1300 and the electrode 107, in the interior 1305 of the pocket 1300. In one embodiment, a loop such as that discussed with reference to FIGS. 21(a)-21(c) is positioned in the interior 1305 of the pocket 1300. In another embodiment, a tube such as that discussed with reference to FIG. 26 is positioned in the interior 1305 of the pocket 1300.

FIG. 37(a) and 37(b) illustrates an alternate embodiment of the lead electrode assembly 100. This embodiment is

substantially similar to the embodiment illustrated in FIGS.
36(a)-36(b).

FIG. 37(a) illustrates a bottom plan view of the lead
5 electrode assembly 100 of this embodiment. In this embodiment,
the electrode 107 is thumbnail shaped.

FIG. 37(b) illustrates a top plan view of the lead
electrode assembly 100 of this embodiment. The top surface 1331
10 of the molded cover 220 is shaped to accommodate the thumbnail
shaped electrode 107.

Like the embodiment discussed with reference to FIGS. 36(a)
and 36(b), the pocket 1300 comprises a layer of material 1315.
In this embodiment, however, the layer of material 1315 has a
roughly triangular shape. The layer of material 1315 comprises
a periphery 1318 and a middle portion 1319. More particularly,
the layer of material comprises a first side 1340, a second side
1341 and a third side 1342 of the layer of material 1315. The
20 periphery 1318 of the layer of material comprises the first side
1340, the second side 1341 and the third side 1342 of the layer
of material 1315. The middle portion 1319 of the layer of
material 1315 comprises the area between the first side 1340,

the second side 1341 and the third side 1342 of the layer of material 1315.

In this embodiment, the bounded region 1325 of the pocket 1300 comprises a portion of the periphery 1318 of the layer of material 1315. The bounded region 1325 of the pocket 1300 comprises the first side 1340 and the second side 1341 of the layer of material 1315. The center 1326 of the pocket 1300 comprises the middle portion 1319 of the layer of material 1315. The opening 1310 of the pocket 1300 comprises the third side 1342 of the layer of material 1315 and the top surface 1331 of the molded cover 220. The bounded region 1325 of the pocket 1300 is curved around the center 1326 of the pocket 1300. The bounded region 1325 of the pocket 1300 does not completely enclose the center 1326.

In this embodiment, the bounded region 1325 of the pocket comprises a contiguous portion of the periphery 1318 of the layer of material 1315. In an alternate embodiment, the bounded region 1325 of the pocket comprises a plurality of segmented portions of the periphery 1318 of the layer of material 1315.

In an alternate embodiment the bounded region 1325 of the pocket 1300 does not comprise any portion of the periphery 1318 of the layer of material 1315.

5 FIG. 38(a)-38(c) illustrates a lead electrode assembly manipulation tool 927. The lead electrode assembly manipulation tool 927 illustrated is useful for manipulating a lead electrode assembly 100 having a pocket 1300 during the implantation of the lead electrode assembly 100 in a patient. Examples of such a
10 lead electrode assembly 100 embodiments are shown in FIGS. 36(a), 36(b), 37(a) and 37(b).

15 FIG. 38(a) is a top view of the lead electrode assembly manipulation tool 927 of this embodiment. The lead electrode assembly manipulation tool 927 comprises a handle 1142 (not shown), a rod 1144 and a paddle 1350.

20 The rod 1144 and handle 1142 are substantially similar to the rod 1144 and handle 1142 of the lead electrode assembly manipulation tool 927 illustrated in FIGS. 35(a)-35(d). The handle 1142 is connected to the rod 1144.

The paddle 1350 is attached to the distal end 1148 of the rod 1144. The paddle 1350 comprises a disk 1351 and a tang 1161 (phantom view).

5 FIG. 38(b) is a side view of the lead electrode assembly manipulation tool 927 of this embodiment. The tang 1161 is inserted in the slot 1162 in the rod 1144. The tang 1161 is welded into the slot 1162 of the rod 1144.

10 The disk 1351 and the tang 1161 are punched from a single sheet of steel having a thickness of approximately 3 mm. In other embodiments, the disk 1351 and tang 1161 are composed of titanium, a polymeric material or any other material suitable for this purpose. In one embodiment, the handle 1142, the rod 1144 and the paddle 1350 are all made from the same piece of material.

15 We now turn to FIG. 38(c) for a description of the use of the lead electrode assembly manipulation tool 927 in the
20 implantation of a lead electrode assembly 100 into a patient.

As discussed with reference to FIG. 31, an incision 905 is made in the patient 900. As discussed with reference to FIG.

32(a), a subcutaneous path 1090 is created in the patient 900 with a hemostat 932.

The lead electrode assembly 100 is then captured by the lead electrode assembly manipulation tool 927. The paddle 1350 of the lead electrode assembly manipulation tool 927 is inserted into the pocket 1300 of the lead electrode assembly 100. The paddle 1350 is slid into the interior 1305 of the pocket via the opening 1310 of the pocket until it can go no further. At this point, the paddle 1350 touches the inner surface 1316 of the proximal end 1321 of the layer of material 1315.

The lead 21 of the lead electrode assembly 100 can then be pulled toward the handle 1142 of the lead electrode assembly manipulation tool 927 until it is taught. This acts to prevent the paddle 1350 of the lead electrode assembly manipulation tool 927 from sliding out of the pocket 1300 of the lead electrode assembly 100.

The lead electrode assembly manipulation tool 927 may then be used to place the lead electrode assembly 100 into the incision 905 of the patient as seen in FIG. 31. The lead electrode assembly manipulation tool 927 may then be used to move the electrode 107 to the termination point 1085 of the

subcutaneous path 1090 created as discussed with reference to FIG. 32(c).

The lead electrode assembly 100 is then released from the lead electrode assembly manipulation tool 927. To achieve this, the lead 21 of the lead electrode assembly 100 is released so that the paddle 1350 can slide relative to the pocket 1300 of the lead electrode assembly 100. The lead electrode assembly manipulation tool 927 may then be extracted from the subcutaneous path 1090 leaving the lead electrode assembly 100 behind.

Alternately, a curved hemostat, such as the hemostat 930 discussed with reference to FIG. 32(b) could be inserted in the pocket 1300 of the lead electrode assembly 100. The hemostat could then be used to move the electrode 107 to the termination point 1085 of the subcutaneous path 1090 as discussed above.

Alternately, a curved hemostat, such as the hemostat 930 discussed with reference to FIG. 32(b) could be used to grip the pocket 1300 of the lead electrode assembly 100, and used to move the electrode 107 to the termination point 1085 of the subcutaneous path 1090 as discussed above.

FIGS. 39(a)-39(b) illustrate an alternative embodiment of the lead electrode assembly 100. This embodiment is substantially similar to the embodiment illustrated in FIGS. 38(a)-38(c). The backing layer 130 of this embodiment, however, lacks a pocket 1300. Moreover, the lead electrode assembly 100 of this embodiment further comprises a first channel guide 1401 and a second channel guide 1402.

FIG 39(a) illustrates a cross-sectional rear plan view of the lead electrode assembly 100 of this embodiment. The first channel guide 1401 and a second channel guide 1402 each have an interior 1403 and an opening 1404.

The first channel guide 1401 and the second channel guide 1402 each comprise a strip of material 1406 attached to the molded cover 220.

The strip of material 1406 comprising the first channel guide 1401 is substantially rectangular in shape. The strip of material 1406 comprises a first side 1410 and a second side 1412. The first side 1410 and the second side 1412 of the strip of material 1406 are parallel to each other. In another embodiment, the first side 1410 of the strip of material 1406 is not parallel to the second side 1412.

The strip of material 1406 further comprises an inner surface 1417 and a outer surface 1416. The strip of material is positioned so that the inner surface 1417 of the first side 1410
5 faces the outer surface 1330 of the molded cover 220. The first side 1410 of the strip of material is attached to the first side 1333 of the top surface 1331 of the molded cover 220. The second side 1412 of the strip of material 1406 is attached to the skirt 222 of the molded cover 220.

The interior 1403 of the first channel guide is formed between the inner face 1417 of the strip of material 1406 and the outer surface 1330 of the molded cover 220.

The second channel guide is formed in substantially the same way on the second side 1334 of the molded cover 220.

FIG. 39(b) illustrates a top plan view of the lead electrode assembly of the embodiment of FIG. 39(a). The strip
20 of material 1406 comprising the first channel guide 1401 is substantially rectangular in shape having a distal end 1413 and a proximal end 1414. The distal end 1413 and the proximal end 1414 of the strip of material 1406 are parallel to each other. In another embodiment, the distal end 1413 of the strip of

material 1406 is not parallel to the proximal end 1414 of the strip of material 1406.

The opening 1404 of the first channel guide 1401 is formed
5 by the distal end 1413 of the strip of material 1406 and the outer surface 1330 of the molded cover 220.

10 The first side 1410 and the second side 1412 (not shown) of the strip of material 1406 comprising the first channel guide 1401 are positioned so that they lie parallel to the first side 1333 (phantom view) of the molded cover 220.

15 The second channel guide 1402 is formed and mounted to the lead electrode assembly 100 in substantially the same way as the first channel guide 1401. The first side 1410 and the second side 1412 (not shown) of the strip of material 1406 comprising the second channel guide 1402 are positioned so that they lie parallel to the second side 1333 (phantom view) of the molded cover 220.

20

The strips of material 1406 are composed of polyurethane. In an alternate embodiment, the strips of material 1406 are composed of any polymeric material. The strips of material 1406 are fastened to the molded cover 220 with stitching 360.

In an alternate embodiment, the strips of material 1406 are made of molded silicone and attached to the molded cover 220 by fusing them to the molded cover 220. In an alternate embodiment, the first channel guide 1401 and the second channel guide 1402 are formed as part of the molded cover 220.

FIG. 40(a)-40(b) illustrates a lead electrode assembly manipulation tool 927. The lead electrode assembly manipulation tool 927 illustrated is useful for manipulating a lead electrode assembly 100 having a first channel guide 1401 and a second channel guide 1402 during the implantation of the lead electrode assembly 100 in a patient. Examples of such a lead electrode assembly 100 embodiments are shown in FIGS. 39(a)-39(b).

FIG. 40(a) illustrates a top plan view of a lead electrode assembly manipulation tool 927. The lead electrode assembly manipulation tool 927 in this embodiment comprises a handle 1142 (not shown), a rod 1144 and a channel guide fork 1446.

The rod 1144 and handle 1142 are substantially similar to the rod 1144 and handle 1142 of the lead electrode assembly manipulation tool 927 illustrated in FIGS. 35(a)-35(d). The handle 1142 is connected to the rod 1144.

The channel guide fork 1446 is attached to the distal end 1148 of the rod 1144. The channel guide fork 1446 comprises a pair of tines 1451 separated by a gap 1455 and a tine base 1450
5 having a tang 1161.

The pair of tines 1451 each have a proximal end 1452 and a distal end 1453. The proximal ends 1452 of the pair of tines 1451 are attached to the tine base 1450. The pair of tines 1451
10 have a substantially cylindrical form. The distal end 1453 of each of the pair of tines 1451 is rounded.

The length of the pair of tines 1451 is substantially equal to the length of the first side 1410 of the strips of material 1406 comprising the first channel guide 1401 and second channel guide 1402. In alternate embodiments, the length of the tines 1451 is substantially greater than or less than the length of the first side 1410 of the strips of material 1406 comprising the first channel guide 1401 and second channel guide 1402.
15

20

The tines are separated by a gap 1455 between the proximal ends 1452 of the pair of tines 1451. The pair of tines 1451 are substantially straight and substantially parallel to each other.

The tine base 1450 connects the pair of tines 1451 to the distal end 1148 of the rod 1144. The tine base 1450 comprises a tang 1161 (phantom view). The tang 1161 is inserted in a slot 1162 in the rod 1144. The tang 1161 is welded in the slot 1162
5 of the rod 1144.

10 The pair of tines 1451 comprising the channel guide fork 1446 are composed of steel and have a diameter of approximately 3 mm. The tine base 1450 comprising the channel guide fork 1446 is punched from a single strip of steel having a thickness of approximately 3 mm. The pair of tines 1451 are welded to the
tine base 1450.

15 In other embodiments, the channel guide fork 1446 is composed of metal, a polymeric material, or any other material suitable for this purpose. In one embodiment, the handle 1142, the rod 1144 and the channel guide fork 1446 are all made from the same piece of material.

20 We now turn to FIG. 40(b) for a description of the use of the lead electrode assembly manipulation tool 927 in the implantation of a lead electrode assembly 100 into a patient.

As discussed with reference to FIG. 31, an incision 905 is made in the patient 900. As discussed with reference to FIG. 32(a), a subcutaneous path 1090 is created in the patient 900 with a hemostat 932.

5

The lead electrode assembly 100 is then captured by the lead electrode assembly manipulation tool 927. The pair of tines 1451 of the lead electrode assembly manipulation tool 927 is inserted into the openings 1404 in the first channel guide 1401 and second channel guide 1402.

The electrode 107 is placed into the gap 1455 between the tines of the channel guide fork 1446. The tines 1451 fit into the interior 1403 of the first channel guide 1401 and second channel guide 1402. The molded cover is slid toward the proximal end 1452 of the tines until it can go no further. The lead 21 of the lead electrode assembly 100 can then be pulled in toward the handle 1142 of the lead electrode assembly manipulation tool 927 until it is taught. This acts to prevent the lead electrode assembly 100 from sliding toward the distal end 1453 of the pair of tines 1451 of the channel guide fork 1446.

The lead electrode assembly manipulation tool 927 may then be used to place the lead electrode assembly 100 into the incision 905 of the patient as seen in FIG. 31. The lead electrode assembly manipulation tool 927 may then be used to move the electrode 107 through the termination point 1085 of the subcutaneous path 1090 created as discussed with reference to FIG. 32(c).

The lead electrode assembly 100 is then released from the lead electrode assembly manipulation tool 927. To achieve this, the lead 21 of the lead electrode assembly 100 is released so that the pair of tines 1451 of the channel guide fork 1446 of the lead electrode assembly manipulation tool 927 can slide relative to the first channel guide 1401 and second channel guide 1402 of the lead electrode assembly 100. The lead electrode assembly manipulation tool 927 may then be extracted from the subcutaneous path 1090 leaving the lead electrode assembly 100 behind.

FIG. 41(a) illustrates a subcutaneous implantable cardioverter-defibrillator kit 1201 of the present invention. The kit comprises a group of items that may be used in implanting a S-ICD system in a patient. The kit 1201 comprises a group of one or more of the following items: an S-ICD canister

11, a lead electrode assembly 100, a hemostat 1205, a lead electrode assembly manipulation tool 927, a medical adhesive 1210, an anesthetic 1215, a tube of mineral oil 1220 and a tray 1200 for storing these items.

5

In one embodiment, the S-ICD canister 11 is the S-ICD canister 11 seen in, and discussed with reference to FIG. 1.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180
10185
10190
10195
10200
10205
10210
10215
10220
10225
10230
10

enhanced hemostat seen in, and discussed with reference to FIG.
31.

The lead electrode assembly manipulation tool 927 is the
5 lead electrode assembly manipulation tool 927 with a rail fork
1146. In alternate embodiments, the lead electrode assembly
manipulation tool 927 is any lead electrode assembly
manipulation tool 927 including a paddle or a channel guide
fork.

10 The medical adhesive 1210 comprises a roll of clear, 1-inch
wide medical adhesive tape. As will be recognized, the medical
adhesive could be a liquid adhesive, or any other adhesive
substance.

15 The anesthetic 1215 is a one ounce tube of lidocaine gel.
This can be used as a local anesthetic for the introduction of
the lead electrode assembly 100 as discussed below. As will be
recognized, the anesthetic could be any substance that has a
20 pain-killing effect. Alternatively, one could use an injectable
form of anesthetic inserted along the path of the lead.

The tube of mineral oil 1220 is a one ounce tube of mineral oil. This can be used for oiling parts of the electrode connector block 17 seen in FIG. 1.

5 The tray 1200 is a box sized to fit the items of the kit 1201. The tray 1200 is composed of molded plastic. In another embodiment, the tray 1200 is a cardboard box. One skilled in the art will recognize that the tray 1200 may comprise any container capable of containing the items of the kit. In one
10 embodiment, the tray is formed with recessed partitions 1230 that generally follow the outline of the items of the kit 1201 to be stored in the tray. In one embodiment, the tray 1200 has packaging material 1225 disposed over it, wherein the packing
15 material 1225 provides a sanitary cover for the items of the kit 1201. The packaging material 1225 further acts to contain the items of the kit 1201.

In an alternate embodiment the kit 1201 comprises ten lead electrode assemblies 100 each comprising a lead 21 having a lead
20 length, l_{Lead} , different from the others. In one embodiment, the lead lengths range between approximately 5 cm and approximately 52 cm with approximately a 10 cm difference between the lead length of each lead electrode assembly 100.

In an alternative embodiment, the kit 1201 comprises an S-ICD canister 11, a hemostat 1205 and an assortment of lead electrode assemblies 100 each comprising a lead 21 having a lead length, l_{Lead} , different from the others.

5

In one embodiment, the kit 1200 further comprises a tray 1201 and an assortment of lead electrode assemblies 100, each with an electrode 107 curved at a radius r different from the others.

In another embodiment, the kit 1200 includes components sized for surgery on a patient of a particular size. A kit 1200 for a 10 year old child, for example, includes an S-ICD canister 11 with a length of approximately 10 cm, a lead electrode assembly 100 with a lead length, L_{Lead} of approximately 12 cm and a radius r of approximately 10 cm and hemostat 1205 with a hemostat length, L_{Hemostat} , of approximately 12 cm.

The S-ICD device and method of the present invention may be embodied in other specific forms without departing from the teachings or essential characteristics of the invention. The described embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by

the foregoing description and all changes which come within the meaning and range of equivalency of the claims are therefore to be embraced therein.

09940356-002701
FDZ230-95E04660